

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


T 4S, R 36E., W.M.

Corner Code No. N-17

Note: Monument marked as shown below

**History of original corner establishment:**

This corner was originally established by Herman D. Graddon, U.S. Deputy Surveyor, under Contract No. 452, dated June 16, 1882. The original notes state that at the corner a 20 by 10 by 8 inch basalt stone, marked with 3 notches on S, and 2 notches on E. edge, was set 15 inches in the ground and a mound of stone was raised alongside.

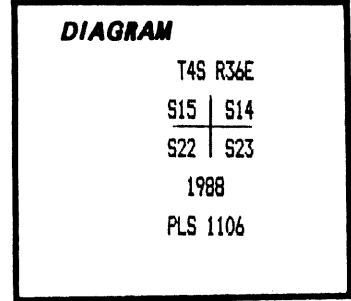

Corner No.  
Compass Declination: 19.0°E

**Description of corner evidence found:**

None. This corner was searched for 8.5 hours with a 2 person crew including PLS. A search area with a radius of 200 feet was covered. Since "stubbing" of the corner was possible, we also searched areas where the corner would have fell if stubbed from the North, South, East, or West. I also note that original topographic calls in the corner area are inconsistent with topography around the corner.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

The corner position was reestablished by double proportion measure, using found 1/4 corners North, South East and West of the corner. At the reestablished corner position, set a 2 1/2" by 30" aluminum pipe with 2 1/2" aluminum cap 15" in the ground to bedrock and surrounded with a mound of earth and stone. From the reestablished corner monument I mark the following new accessories:

- A 7" mountain mahogany bears N 4 1/2°E 20.0' scribed T4S R36E S14 BT.
  - A 7" mountain mahogany bears S72°E 11.8' scribed T4S R36E S23 BT.
  - A 5' by 2 1/2' by 2 1/2" out of the ground rock outcrop bears S2°W 17.9', marked "XB0" on Northeast face. (Measurements were made to the "X", painted the "XB0" marks red).
  - The 7" south stem of a mountain mahogany bears N22 1/2°W 49.5' scribed T4S R36E S15 BT.
- Measurements to bearing trees were made to the center of the root crown where it enters the ground. Bearing trees have a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 and 54-9 and painted face of blaze and a 6" red band around each bearing tree. Set steel fence posts east and west of corner and attached sign 54-9 to one post and sign 54-2 to both posts.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>1-5-89</u>
Date Filed <u>1-6-89</u>
By <u>G. LANGRIZ, DEPUTY</u>
File No. <u>2-89 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
---

*William R. Wells*

OREGON JULY 22, 1977 WILLIAM R. WELLS 1106
---

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)