


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 452, dated June 16, 1882. Surveyor General record states:
Set basalt stone 12 X 12 X 5 for 1/4 corner from which,
A 36 in. dia. pine brs. S20°E, 47 lks.

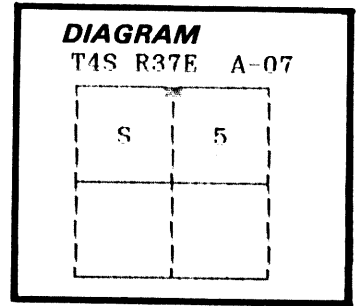

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a stone mound with a 12 x 12 x 5 stone with possible chisel marks.
Found a 30+ pine stump, S20°E, 47 lks., no marks visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which;


New Bearing Trees:

- A 9 inch diameter Ponderosa Pine bears N52°E, 73.54 feet marked XX BT
- A 12 inch diameter Ponderosa Pine bears S18°E, 88.73 feet marked 1/4 X BT
- A 13 inch diameter Ponderosa Pine bears S80°W, 43.74 feet marked 1/4 S5 BT
- A 13 inch diameter Ponderosa Pine bears N28°W, 80.34 feet marked X BT

Raised a mound of stone around monument, 3 ft. base to top of cap.
Buried stone north and alongside monument.

I hereby certify that the above corner point was perpetuated as hereon described on November 3, 1992.

Witness: Jeff Peterson

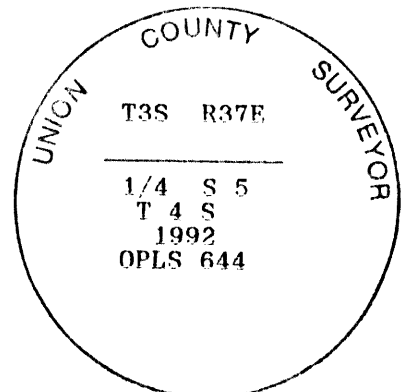

I used a steel tape and magnetic compass in the establishment of new accessories. I used 15° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

UNION COUNTY SURVEYOR

Date Received 11/23/92

Date Filed 11/27/92

By Greg Blackman

File No. 087-1992R.