


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Herman D. Gradon under GLO contract Number 452, dated June 6, 1882. Surveyor General record states:
Set basalt stone 14x14x3", 9 ins. In the ground for 1/4 sec cor. marked 1/4 on W. face from which:
A pine 20 ins diam bears N 20° W 75 lks dist marked 1/4 SBT. No other tree within limits and raised a mound of stone alongside.

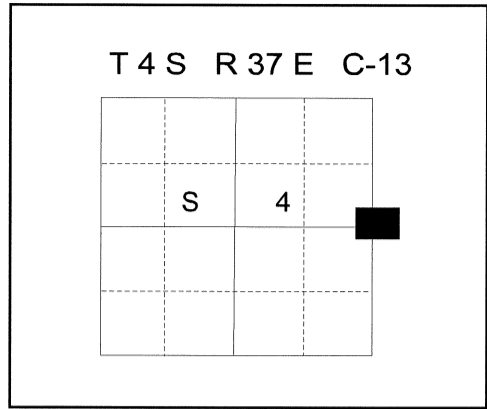

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey Number 011-2009

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2 1/2" x 30" Aluminum pipe, with aluminum cap marked as shown, 24" in the ground, with 2 ft. wide mound of stone, from which:


- A 19" Western Larch bears North 15° East, a distance of 73.35 feet, marked 1/4 S3 BT.
- An 11" Ponderosa Pine bears South 18° East, a distance of 27.22 feet, marked 1/4 S3 BT.
- A 6" Ponderosa Pine bears South 46° West, a distance of 52.00 feet, marked X BT.
- A 12" Ponderosa Pine bears North 35° West, a distance of 34.68 feet, marked 1/4 S4 BT.

Set a steel fencepost 1 feet North of corner. Corner falls 20 feet West of a North/South running creek.

I hereby certify that the corner was perpetuated on May 28, 2009

Witness: Jeff Hsu, Gregory T. Blackman, Jr.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

T 4 S R 37 E
1/4
S 4 | S 3
2009
OPLS 2219

**UNION COUNTY
SURVEYOR**

Date Received 6/1/09

Date Filed 6/1/09

Filed By Gregory T. Blackman

File Number 011-2009R

I used a steel tape and magnetic compass in the establishment of the bearing trees. I used 18° East declination. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the new bearing tree.