


**RTIFIED RECORD OF LAND CORNER MONUMEN . TION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Herman D. Gradon under GLO contract Number 452, dated June 6, 1882. Surveyor General record states: Set basalt stone 18x10x10", 12 ins. in the ground for 1/4 sec cor. marked 1/4 on N. face from which:

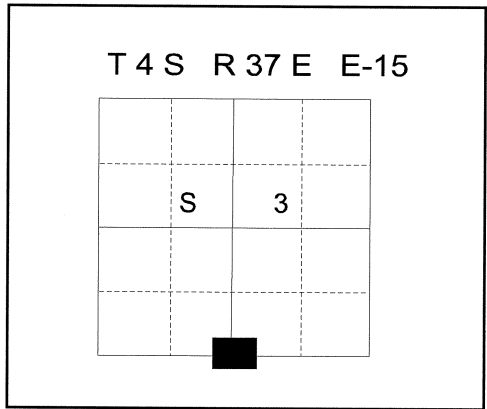

A pine 20 ins diam bears N 40° E 82 lks dist marked 1/4 SBT. A pine 40 ins diam bears S 71° E 48 lks dist marked 1/4 SBT.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a mound of stone with several stones at or near call size. Found no discernable marks on any stone. Found 26 inch diameter burned pine snag South 41° West, 28.0 ft. (to face of blaze) blaze evident (previously painted) with two scribe marks visible. Blaze faces mound of stone. Mound is harmonious with the creek call to the East.

See Union County Survey Number 013-2009


**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the mound of stone, I set a 2 1/2" x 30" Aluminum pipe, with aluminum cap marked as shown, 20" in the ground, with mound of stone, 3 ft. base to top of cap, from which:

- A 16" Ponderosa Pine bears North 21° East, a distance of 17.36 feet, marked 1/4 S3 BT.
- A 14" Douglas Fir bears North 64° East, a distance of 49.11 feet, marked 1/4 S3 BT.
- A 7" Ponderosa Pine bears South 11° East, a distance of 50.45 feet, marked X BT.
- A 14" Ponderosa Pine bears South 69° West, a distance of 36.72 feet, marked 1/4 S10 BT.

I hereby certify that the corner was perpetuated on June 11, 2009  
Witness: Gregory T. Blackman, Jr.

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**



**OREGON**  
July 17, 1986  
**RICK G. ROBINSON**  
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

**T 4 S    R 37 E**

1/4         
S 3  
S 10

2009  
OPLS 2219

**UNION COUNTY  
SURVEYOR**

Date Received 6/25/09

Date Filed 6/29/09

Filed By Gregory T. Blackman

File Number 022-2009R

I used a steel tape and magnetic compass in the establishment of the bearing trees. I used 18° East declination. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the new bearing tree.