


**UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner was established by Hermon Gradon under GLO contract Number 452, dated June 16, 1882. The Surveyor General states: Set basalt stone 16x8x5 ins. 11 ins. in the ground for corner to Sections 1 and 12, marked with 5 notches on the South and 1 notch on the

**T4S R37E**

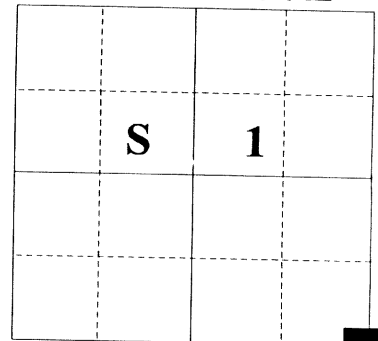

North edge: From which:

A Pine 5" dia. Bears S 70° W, 33 lks. Marked T4S R37E S 12 BT.

A Pine 13" dia. bears N 65° W, 80 lks. Marked T4S R37E S1 BT.

No record of subsequent monumentation found in County Survey records.

**Description of corner evidence found:**

Found a 31" Ponderosa Pine, S 70° W, 33 lks, Blazes evident, alive and vigorous.

Found Pine Stump, badly rotted at called bearing and distance for Northwest Bearing tree, no scribes or blazes evident

Found Basalt stone 17"x10"x4" with 5 notches and 1 notch visible, lying loose upon the ground at record position.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At record bearing and distance from original Bearing Trees, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 26" in the ground and raised a mound of stone with a 2 foot base to top of cap, and buried the original stone to the north of the cap,

FROM WHICH, NEW BEARING TREES:

A 13½" Ponderosa Pine bears N 53° E, a distance of 82.6 feet, marked X BT.

A 8½" Ponderosa Pine bears S 15½° E, a distance of 92.4 feet, marked Y BT.

A 31" Ponderosa Pine bears S 70° W, a distance of 33 lks ( 21.78 feet ) blazes evident, Original BT., Distance to the original face of blaze.

A 17½" Ponderosa Pine bears N 36½ W, a distance of 66.60 feet, marked T4S R37E S 1 BT.

I hereby certify that the corner was monumented on June 30, 1997.


Witness: Gregory T. Blackman Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

*Renewal Date: December, 31 1997*

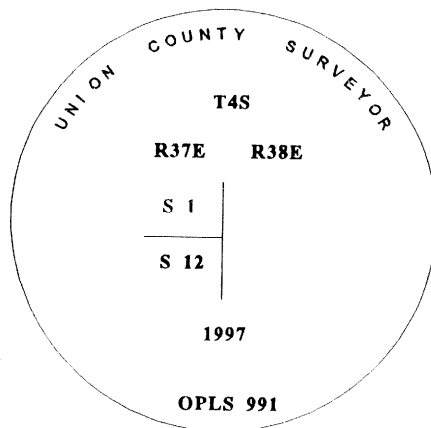

**UNION COUNTY  
SURVEYOR**

Date Received 8-8-97

Date Filed 8-23-97

Filed By R. Robinson, Deputy

File Number 018-1997R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination. Distances are to a 60d spike driven into the root crown at the right side of the bearing trees.