


**RTIFIED RECORD OF LAND CORNER MONUMEN. ION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

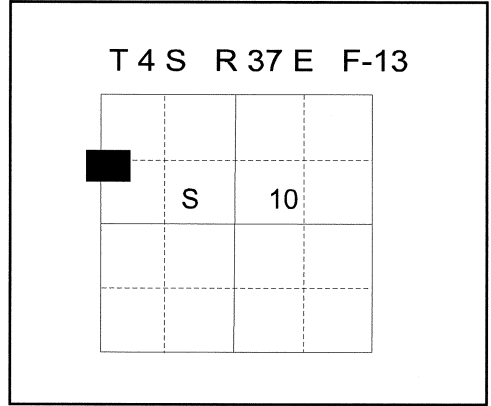

See Union County Survey Number 013-2009

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron pin, with aluminum cap marked as shown, 20" in the ground, with 2 ft. wide mound of stone, from which:

A 13 inch Ponderosa Pine bears South 20° East, a distance of 37.68 feet, marked N 1/16 S10 BT.


A 14 inch Ponderosa Pine bears South 73° West, a distance of 26.27 feet, marked N 1/16 S9 BT.

Corner falls on a open rocky hillside facing Northeast. Set a steel fencepost 2 feet North of corner.

I hereby certify that the corner was monumented on June 11, 2009

Witness: Jeff Hsu

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**



**OREGON**  
July 17, 1986  
**RICK G. ROBINSON**  
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

T 4 S R 37 E  
N 1/16

S 9 | S 10

2009

OPLS 2219

**UNION COUNTY  
SURVEYOR**

Date Received 6/25/09

Date Filed 6/29/09

Filed By Gary T. Black

File Number 023-2009R

I used a steel tape and magnetic compass in the establishment of the accessories. Magnetic declination is 18° East. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the bearing trees.