

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey Number 013-2009

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At position determined by survey, I set a 5/8" x 30" iron pin, with 2 1/2" aluminum cap marked as shown, 28" in the ground, from which:

A 19 inch Douglas Fir bears South 42° West, a distance of 32.02 feet, marked NW 1/16 S10 BT.

A 16 inch Douglas Fir bears North 61° West, a distance of 19.15 feet, marked NW 1/16 S10 BT.

I hereby certify that the corner was monumented on June 16, 2009

Witness: Jeff Hsu, Gregory T. Blackman, Jr.

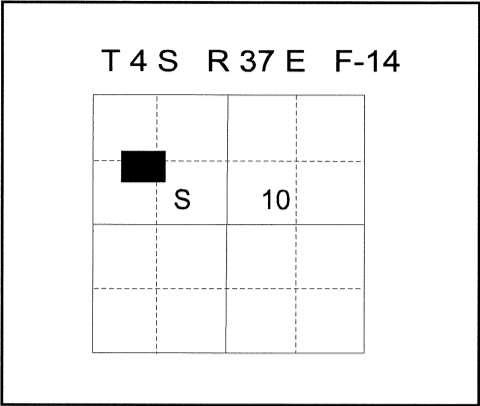

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Rick G. Robinson

OREGON
July 17, 1986

RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

T 4 S R 37 E

NW 1/16 S 10

OPLS 2219

2009

**UNION COUNTY
SURVEYOR**

Date Received 6/25/09

Date Filed 6/29/09

Filed By *Gregory T. Blackman, Jr.*

File Number 026-2009R

I used a steel tape and magnetic compass in the establishment of the accessories. Magnetic declination is 18° East. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the bearing trees.