

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-13

History of original corner establishment:

Corner originally established by Herman Gradon under Contract No.452, dated June 16, 1882.

Surveyor General records state:


Set a basalt stone 18 x 14 x 5 ins 12 ins in the ground for Cor to Secs 9, 10, 15 & 16, marked with 4 notches on S & 3 notches on E edges from which:

A fir 22 ins diam bears N70°E, 14 lks dist marked T4SR37ES10 BT.

A pine 20 ins diam bears S60°E, 29 lks dist marked T4SR37ES15 BT.

A pine 10 ins diam bears S30°W, 10 lks dist marked T4SR37ES16 BT.

A fir 28 ins diam bears N50°W, 10 lks dist marked T4SR37ES9 BT.

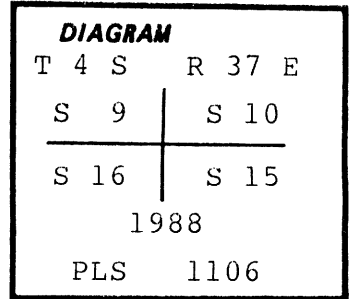

Description of corner evidence found:

Found a basalt stone 11 x 10 x 6" with 4 notches on South & 3 on East from which:

A very rotted sawn pine, about 15" diam brs S30°W, 6.6', scribes sawn off.

A root hole depression brs N70°E, 9.2'.

No other remains of original BTs.

UNION COUNTY SURVEYOR
Date Received <u>1-5-89</u>
Date Filed <u>1-6-89</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>7-89 R</u>

Description of monument and accessories established to perpetuate the original location of this corner:

At position of found stone ...

Set a 2½" aluminum cap on 2½ x 30" aluminum pipe 24" in ground, surrounded with mound of earth and stone & 6' steel fence post North of corner with sign 54-9 attached. Cap marked as shown in corner diagram. Buried corner stone in mound.

New bearing trees established:

A 21"ponderosa pine brs N38½°E, 70.0' scribed T4SR37ES10 BT.

A 17"ponderosa pine brs S76½°E, 88.9' scribed T4SR37ES15 BT.

A 10"ponderosa pine brs S64°W, 62.2' scribed T4SR37ES16 BT.

A 10"ponderosa pine brs N30½°W, 74.8' scribed T4SR37ES9 BT.

New BTs have a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 & 54-9, painted face of blaze & a 6" red band around each BT.

Compass declination 19° East.

I hereby certify that the above corner monument was properly remonumented to U.S.F.S. standards by me on October 07, 1988.

REGISTERED PROFESSIONAL LAND SURVEYOR

William R. Wells

OREGON JULY 22, 1977 WILLIAM R. WELLS 1106

Office of.....County Surveyor..... County of..... Union
State of..... Oregon

....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200919

CORNER COMMON TO SECTIONS 9, 10, 15 AND 16

TWP. 4 S RGE. 37 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: May 12, 2009

LAT: 45 ° 13 ' 29.95143 " N

SURVEYOR: RICK ROBINSON
OPLS 2219

LONG: 118 ° 10 ' 38.48471 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 576720.179 INT FT.

E: 8800428.712 INT FT.

TYPE: GPS

THETA: 1 ° 38' 49.9 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998950632

ELEV: 4457.1286 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 2 1/2" aluminum cap monument marked as shown in mound of stone

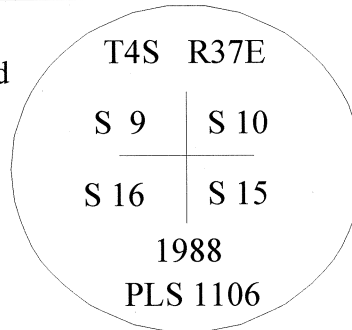

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1988
RICK G. ROBINSON
2219

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

Renewal Date: December 31, 2010