

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-15

History of original corner establishment:


Corner originally established by Herman Gradon under Contract No.452, dated June 16, 1882.

Surveyor General records state:

Set a basalt stone 22 x 10 x 3 ins 16 ins in the ground for 1/4 Sec Cor marked 1/4 on N face from which:

A pine 18 ins diam bears N40°E, 100 lks dist marked 1/4S BT.

A pine 12 ins diam bears S30°E, 125 lks dist marked 1/4S BT.

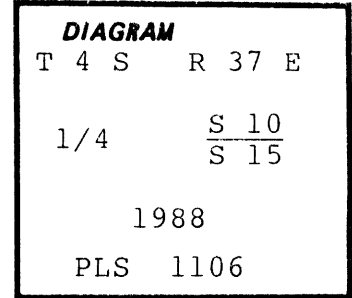

Description of corner evidence found:

Found a basalt stone 19 x 10 x 4" marked "1/4" lying flat in small mound of stone. Traces of an old fence (wood posts only) approaches from South & West.

No traces of old bearing trees remain.

UNION COUNTY SURVEYOR
Date Received <u>1-5-89</u>
Date Filed <u>1-6-89</u>
By <u>G. LANGLITZ DEPUTY</u>
File No. <u>8-89 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner:

At position of found stone...

Set a 2½" aluminum cap on 2½ x 30" aluminum pipe 10" in ground, to bedrock, surrounded with mound of earth and stone & 6' steel fence post East of corner with sign 54-9 attached. Cap marked as shown in corner diagram. Buried corner stone in mound.

New bearing trees established:

A 15" ponderosa pine brs N19½°W, 77.7' scribed 1/4S10 BT.

A 10" ponderosa pine brs S34°W, 64.3' scribed 1/4S15 BT.

New BTs have a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 & 54-9, painted face of blaze & a 6" red band around each BT.

Compass declination 19° East.

I hereby certify that the above corner monument was properly remonumented to U.S.F.S. standards by me on October 07, 1988.

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 22, 1977 WILLIAM R. WELLS 1106

Office of..... County Surveyor..... County of..... Union..... Oregon

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by (COUNTY OFFICIAL) (DEPUTY)

J-15

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200923

QUARTER CORNER COMMON TO SECTIONS 10 AND 15

TWP. 4 S RGE. 37 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: June 9, 2009

LAT: 45 ° 13 ' 29.76776 " N

SURVEYOR: RICK ROBINSON
OPLS 2219

LONG: 118 ° 10 ' 1.10798 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 576778.648 INT FT.

E: 8803103.091 INT FT.

TYPE: GPS

THETA: 1 ° 39' 16.4 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998950623

ELEV: 4519.16 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 2 1/2" aluminum cap monument marke
as shown in mound of stone

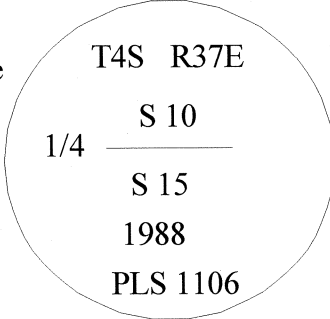

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

1 METER = 3.280833333... US FEET = 39.37 INCHES
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)