

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey Number 015-2009

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin, with 2 1/2" aluminum cap marked as shown, 15" in the ground, with mound of stone 1 ft. wide, from which:


A 5/8" x 30" iron pin bears South 0°02'39" West, a distance of 35.00 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SOUTH RP

A 9 inch Ponderosa Pine bears North 74° West, a distance of 141.31 feet, marked N 1/16 S18 BT.

I set a steel fencepost 1 foot North of the corner.

I hereby certify that the corner was monumented on July 7, 2009

Witness: Jeff Hsu, Gregory T Blackman, Jr.

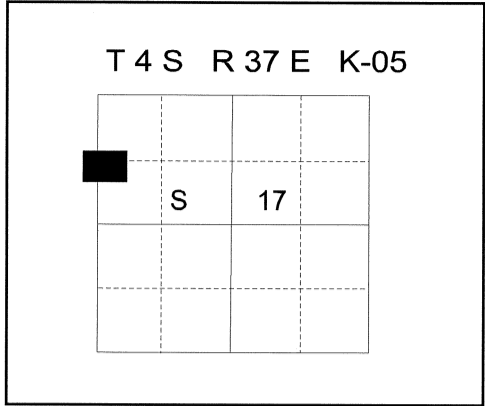

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

T 4 S R 37 E
N 1/16

S 18 | S 17

2009
OPLS 2219

**UNION COUNTY
SURVEYOR**

Date Received 7/13/09

Date Filed 8/5/09

Filed By *Gregory T. Blackman*

File Number 030-2009R

I used a steel tape and magnetic compass in the establishment of the bearing tree accessories. Magnetic declination is 18° East. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the bearing tree. The measurements to the iron pin accessory was established by a Leica 1200 RTK GPS unit. Measurements are to the center of the aluminum cap. Basis of bearings is as per Survey Number 015-2009.