

**RTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

See Union County Survey Number 015-2009

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron pin, with 2 1/2" aluminum cap marked as shown, 12" in the ground, with mound of stone 2 ft. wide, from which:


A 15 inch Ponderosa Pine bears South 53° West, a distance of 37.91 feet, marked NW 1/16 S17 BT.

A 15 inch Ponderosa Pine bears North 17° West, a distance of 101.33 feet, marked NW 1/16 S17 BT.

I set a steel fencepost 1 feet North of the corner.

I hereby certify that the corner was monumented on July 7, 2009

Witness: Jeff Hsu, Gregory T Blackman, Jr.

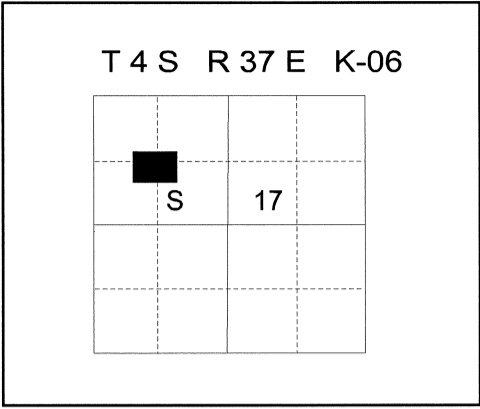

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Rick G. Robinson*

**OREGON**  
July 17, 1986

**RICK G. ROBINSON**  
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

**T 4 S R 37 E**

**NW 1/16 S17**

2009

OPLS 2219

**UNION COUNTY  
SURVEYOR**

Date Received 7/13/09

Date Filed 8/5/09

Filed By *Gregory T. Blackman*

File Number 029-2009R

I used a steel tape and magnetic compass in the establishment of the accessories. Magnetic declination is 18° East. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the bearing trees.