

ARTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey Number 015-2009

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin, with 2 1/2" aluminum cap marked as shown, 12" in the ground, with mound of stone 2 ft. wide, from which:


A 12 inch Douglas Fir bears North 9° East, a distance of 56.26 feet, marked CW 1/16 S17 BT.

An 11 inch Ponderosa Pine bears South 78° East, a distance of 43.77 feet, marked CW 1/16 S17 BT.

I set a steel fencepost 1 feet South of the corner.

I hereby certify that the corner was monumented on July 7, 2009

Witness: Jeff Hsu, Gregory T Blackman, Jr.

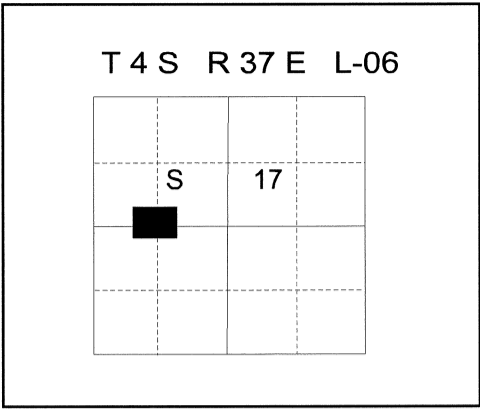


**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

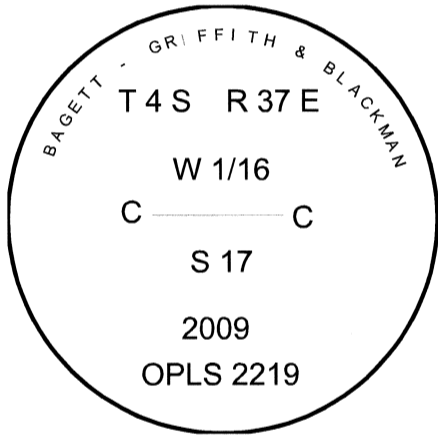

**UNION COUNTY
SURVEYOR**

Date Received 7/13/09

Date Filed 8/5/09

Filed By *Gregory T. Blackman*

File Number 028-209R

I used a steel tape and magnetic compass in the establishment of the accessories. Magnetic declination is 18° East. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the bearing trees.