


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Hermon D. Gradon under GLO contract number 452, dated June 6, 1882 Surveyor General record states:

Set Basalt stone 16"x12"x5" marked 1/4 on West face, set 11 inches in the ground, from which;
A Pine 8" dia. bears S70°E, 28 lks., marked 1/4 S BT.
A Pine 30" dia. bears N 50°W 228 lks., marked 1/4 S BT.

T 4 S R 37 E L - 09

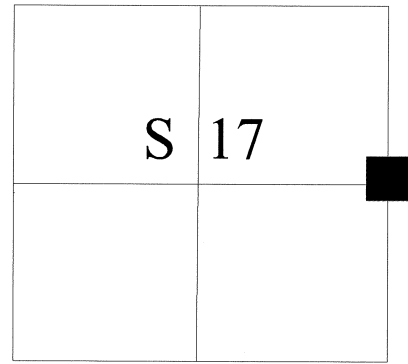

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Survey No. 008-2009

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position established by Survey 008-2009, I set a 2 1/2" Aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, with a small 2' mound of stone, from which:

A 12" Ponderosa Pine bears North 65° East, 10.80 feet, marked 1/4 S16 BT

A 8" Ponderosa Pine bears South 52°East, 13.82 feet, marked 1/4 S16 BT

A 10" Douglas Fir bears South 1°West, 68.22 feet, marked 1/4 S17 BT


A 6" Ponderosa Pine bears North 43°West, 46.18 feet, marked "X" BT

Set Steel fence post 2 feet North of corner.

I hereby certify that the above corner point was monumented as hereon described on May 8, 2009.

Witness: Gregory T. Blackman, Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

T 4 S R 37 E
1/4
S 17 | S 16
2009
OPLS 2219

I used a steel tape and magnetic compass in the establishment of the new accessories. I use 18° East declination. The distances are to a 60d spike driven into the right side of the root crown of the bearing trees. Attached brass washer marked OPLS 2219 to BT Blaze.

**UNION COUNTY
SURVEYOR**

Date Received 6/1/09
Date Filed 6/1/09
Filed By Gregory T. Blackman
File Number 016-2009R

L-09