

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner not set during original GLO survey.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: I set a 5/8" x 30" rebar with 2 1/2" aluminum cap 27" in the ground, marked as shown see (Union County Survey number 020-2010), from which:

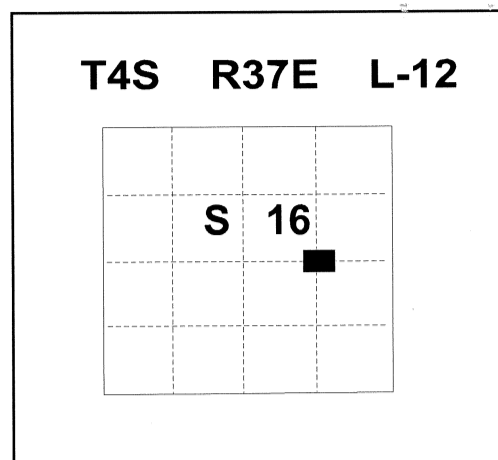

NEW BEARING OBJECTS:


A 14 " Ponderosa Pine bears N 44°E, a distance of 8.05 feet, marked CE 1/16 S16 BT.

A 15 " Douglas Fir bears S 5°W, a distance of 20.25 feet, marked CE 1/16 S16 BT.

I hereby certify that the corner was monumented on August 10, 2010

Witness: Greg Blackman Jr. & Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

**UNION COUNTY
SURVEYOR**

Date Received 8/17/2010

Date Filed 8/17/2010

Filed By Gregory T. Blackman

File Number 031-2010R

BAGGETT - GRIFFITH & BLACKMAN

T4S R37E

E 1/16

C ————— C

S16

2010

OPLS 2219

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the root crown at the right side of the bearing trees. Attached brass washer marked OPLS 2219 to BT blaze.