

11-69A


35

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N-3

History of original corner establishment:

Original survey made by contract No. 452 dated June 16, 1882
The original notes read as follows;
Set a basalt stone 12x12x6 ins 8 ins in the ground, for $\frac{1}{4}$
cor sec cor marked $\frac{1}{4}$ on N face from which;
A pine 14" in diam bears N30°E 16 lks dist. Marked $\frac{1}{4}$ SBT.
A pine 12" in diam bears S70°E 10 lks dist. marked $\frac{1}{4}$ SBT.

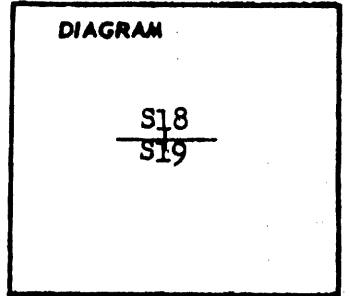


Description of corner evidence found:

none- We could not find stone.
A pine 16" in diam bears N30°E 16 lks dist marked $\frac{1}{4}$ SBT.

Description of monument and accessories I established to perpetuate the original location of this corner

Set a 2" pipe 30" long with bronze cap on top and a 8" plate welded to bottom
The pipe set to a depth of 13" and back filled with stone and soil and
raised a rock and soil monument around the pipe.

I stamped the disk

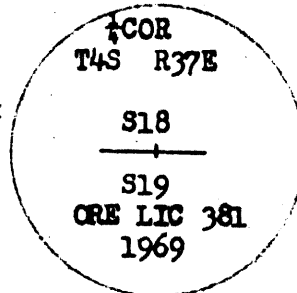

From the corner the original bearing tree is.
A pine 16" in diam bears N30°E 16 lks dist.
marked $\frac{1}{4}$ SBT.

I set a new bearing tree as follows;

A pine 16" in diam bears S35°W 121.8 ft. dist marked with scribe $\frac{1}{4}$ S 19 BT.

Set a steel fence post west of monument with USFS sign 54-4 and a National Forest Boundary sign indicating USFS National Forest land to south.
USFS bearing tree signs were placed on each of the bearing trees facing the monument.

Office of... County Surveyor..... County of... Union

State of... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the... 16... day of... July....., 19 69, at 10:00 o'clock P. m. (signed)

County Surveyor
(COUNTY OFFICIAL)

by

James H. Kelly
(DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 502-84R