

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


T-5

**History of original corner establishment:**

Original survey by Herman D. Gradin under GLO contract number 452, dated June 16, 1882. Official record states:

Set 20" x 8" x 6" basalt stone marked  $\frac{1}{4}$  common to Sections 29, 30, T4S, R37E from which:

- 30" pine bears N 45° E 119 lks.
- 30" pine bears West 100 lks.

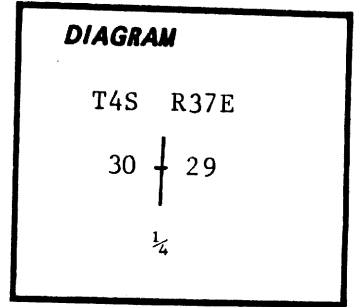


**Description of corner evidence found:**

- Found 20" x 8" x 6" stone marked  $\frac{1}{4}$  in stone mnd. buried 10".
- Found 33" live Pondera Pine, bears S 87° W a distance of 64.3 ft. (scribed "T4S, R37E, S30 BT").
- Found 20" pine snag, bears N 45° E a distance of 85.7 ft. (scribed "T4S, R37E, S29 BT").

**Description of monument and accessories | established to perpetuate the original location of this corner:**

At the cental point of the marked stone, we set a 2 $\frac{1}{2}$ " x 30" galvanized iron pipe, 13" in the ground & mounded to 3" from the top with stones & dirt.

From which:  
Original BTS as described above.



**New BTS as follows:**

- 9" Douglas Fir scribed "T4S, R37E  $\frac{1}{4}$  S30 BT" bears N 9° W a distance of 121 $\frac{1}{2}$  ft.
- 15" Douglas Fir scribed "T4S, R37E  $\frac{1}{4}$  S29 BT" bears N 71° E a distance of 102 $\frac{1}{4}$  ft.
- 10" pine scribed "T4S, R37E  $\frac{1}{4}$  S30 BT" bears S 4° E a distance of 81 $\frac{6}{10}$  ft.

Magnetic compass (20° East declination)  
Steel tape

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Norman J. Paullus, Jr.*

OREGON  
JULY 17, 1961  
NORMAN J. PAULLUS JR.  
1952

Witnesses: Norman Paullus, Jr.  
Gary Keenan

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

UNION COUNTY  
SURVEYOR

---

Date Received 9-26-83  
R GPO-798-276

Date Filed 9-28-83

By G. LANGLITZ DEPUTY

File No. 344-83 R