

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T-21

History of original corner establishment:


Corner established in 1882 by Herman D. Gradin under General Land Office Contract No. 452.

Surveyor General Record states:

Set basalt stone 12x10x5 for corner from which;

A fir 6 in. dia. bears S40E, 71 links

A fir 12 in. dia. bears S30W, 31 links

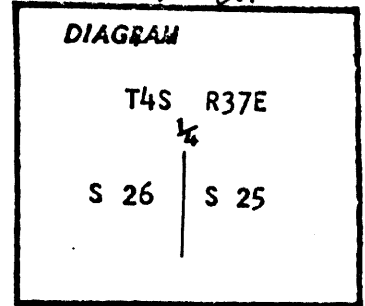

No record of subsequent remonumentation found in County records.
Description of corner evidence found:

Found stone 12x10x4 marked 1/4 from which

ORIGINAL BTs

A fir 12 in. dia. bears S43E, 46.3 feet, scribes visible, Dead.

A stump hole at record bearing and distance SW

See map of survey dated June 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone, I set a 2 1/2 inch x 30 inch iron pipe with brass cap marked as shown, 22 inches in the ground from which;


NEW BTs

A 10 in. dia. fir bears N29E, 21.5 feet marked 1/4 S25 BT

A 16 in. dia. pine bears N31W, 49.7 feet marked 1/4 S26 BT

Buried stone South and along side of pipe.

Raised mound of stone.

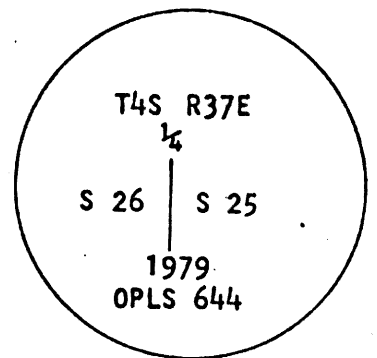

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith
OREGON
JULY 10, 1968
DUANE I. GRIFFITH
644

Brass washer nailed to B.T. blaze.
Used steel tape and magnetic compass
with 18° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed ☆ GPO-708-278 _____

By _____

File No. 511-84 R