


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-17

History of original corner establishment:

Corner established in 1882 by Herman D. Gradin under General Land Office Contract No. 452. Surveyor General Record states:

- Set a basalt stone 16x8x5 for corner from which;
- A fir 6 in. dia. bears N45E, 4 links
- A pine 7 in. dia. bears S65E, 4 links
- A pine 6 in. dia. bears S35W, 42 links
- A fir 5 in. dia. bears N70W, 4 links

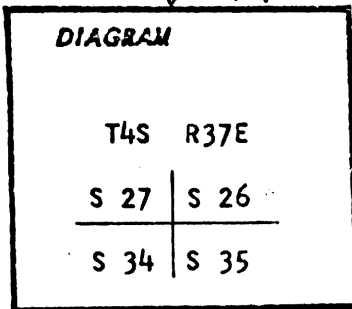

No record of subsequent remonumentation found in County records. Description of corner evidence found:

Found stone 13x8x5 marked with 2 notches and 1 notch from which;

ORIGINAL BTs

- A fir 12 in. dia. bears N70W, 2.6 feet, live with scribes visible
- A stump badly rotted, bears N45E, 2.6 feet, no scribes visible

See map of survey dated June 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown 20 inches in the ground from which;

NEW BTs

- A 28 in. dia. fir bears N64E, 109.1 feet marked T4S R37E S26 BT
- A 5 in. dia. tamarack bears S68E, 23.1 feet marked X BT
- A 12 in. dia. fir bears S26W, 37.4 feet marked T4S R37E S34 BT
- A 9 in. dia. fir bears N41W, 27.3 feet marked T4S R37E S27 BT


Buried stone East and along side of pipe

Raised mound of stone

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON JULY 12, 1884 DUANE I. GRIFFITH 644

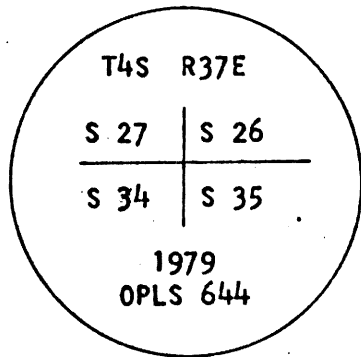

Brass washer nailed to B.T. blaze. Used steel tape and magnetic compass with 18° East declination. Measured to center of all B.T.s

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 513-84R