

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner established in 1882 by Herman D. Gradin under General Land Office Contract No. 452. Surveyor General Record states:

Set post for corner from which;

A fir 3 in. dia. bears N40W, 14 links

A fir 3 in. dia. bears S8W, 9 links

V-19

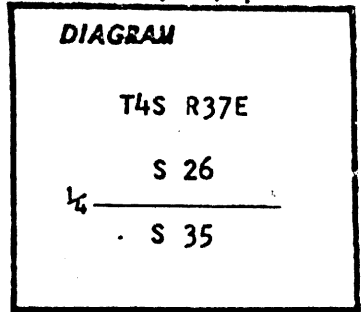

No record of subsequent remonumentation found in County records. Description of corner evidence found:

NONE

See map of survey dated June 1980.


Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate distance I set a 2 1/2 inch x 30 inch iron pipe with brass cap marked as shown, 27" in ground, from which:

A 12" tamarack bears S12E, 48.8 feet, marked 1/4 S35 BT

A 8" fir bears N6W, 17.3 feet, marked 1/4 S26 BT

Raised mound of stone

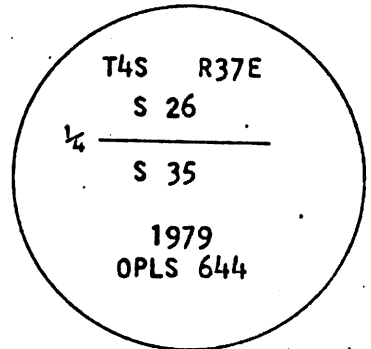

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Handwritten signature

OREGON
JULY 12, 1984
DUANE L. GRIFFITH
644

Brass washer nailed to B.T.blaze.
Used steel tape and magnetic compass
with 18° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY
SURVEYOR

Date Received _____

Date Filed ☆ GPO-788-278 _____

By _____

File No. 514-84 R