


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-23

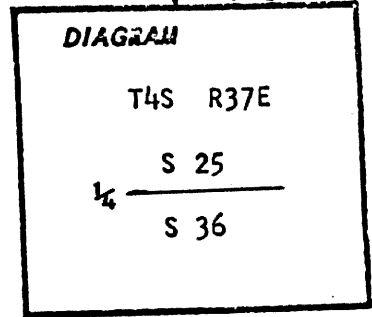

History of original corner establishment:

Corner established in 1882 by Herman D. Gradin under General Land Office Contract No. 452. Surveyor General Record states:

Set post for corner from which;

A black pine 10 in. dia. bears South 27 links

A black pine 8 in. dia. bears N35W, 16 links

No record of subsequent remonumentation found in County records. Description of corner evidence found:

NONE

See map of survey dated June 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:


At proportionate distance, I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown 24 inches in the ground from which;

NEW BTs

A 8 in. dia. tamarack bears S59W, 22.7 feet, marked ¼ S36 BT

A 6 in. dia. tamarack bears N4W, 30.4 feet, marked ¼ S25 BT

Raised mound of stone.

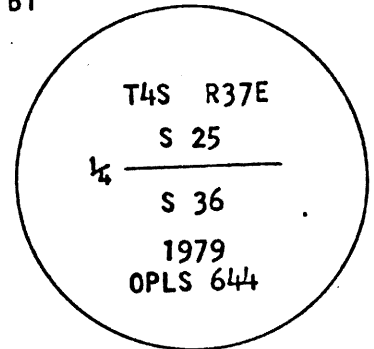

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON JULY 14, 1958 DUANE I. GRIFFITH 644

Brass washer nailed to B.T. blaze. Used steel tape and magnetic compass with 18° East declination. Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

★ GPO—700-278

Date Filed _____

By _____

File No. 516-84R