


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1882 by Herman D. Gradin under General Land Office Contract No. 452.

Surveyor General Record states:

- Set post for corner from which;
- A pine 8 in. dia. bears S60E, 20 links
- A pine 6 in. dia. bears West, 5 links

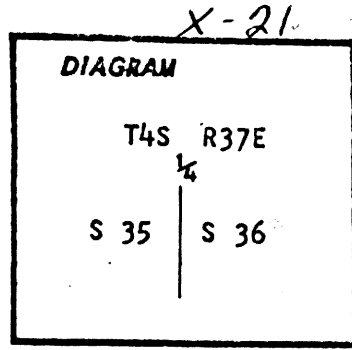

No record of subsequent remonumentation found in County records.
Description of corner evidence found:

NONE

See map of survey dated June 1980.


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown, 25 inches in the ground from which;

NEW BTs

- A 12 in. dia. spruce bears S15E, 6.2 feet marked ¼ S36 BT
- A 11 in. dia. spruce bears S79W, 13.6 feet marked ¼ S35 BT

Raised mound of stone.

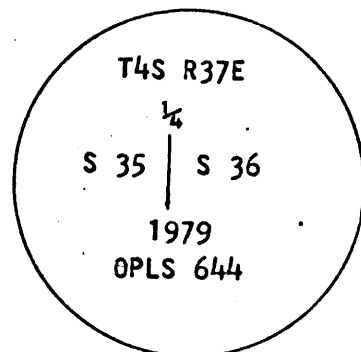

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1906
DUANE I. GRIFFITH
644

Brass washer nailed to B.T. blaze.
Used steel tape and magnetic compass with 18° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

to Received _____

Date Filed ★ GPO-788-276 _____

By _____

File No. 518-84 R