


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Timothy Davenport under GLO contract Number 102, dated July 20, 1863. Surveyor General record states:

Set post for section corner in mound of earth, with charred stake, pits, trench as per instructions from which:

- A 7" Red Fir bears S 35° E, 53 lks
- A 15" Pine bears N 15° E, 25 lks

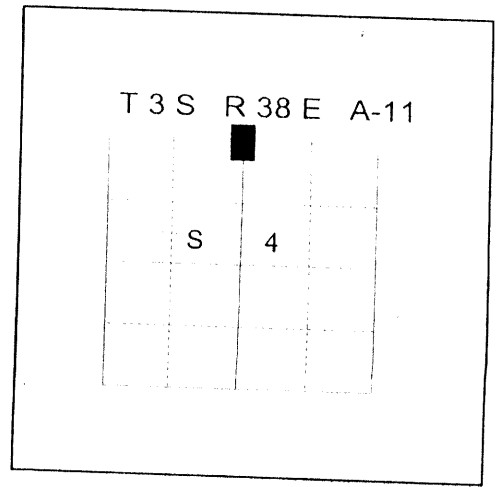

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found.

See Union County Survey Number 26-2002

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned Position for the quarter corner, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground with a small mound of stone, from which;

NEW BEARING TREES AND OBJECT:


- A 10" Douglas Fir bears North 49° East, a distance of 32.30 feet, marked T3S R38E 1/4 S33 BT.
- A 17" Douglas Fir bears South 26° East, a distance of 10.35 feet, marked T4S R38E 1/4 S4 BT.
- A 18" Douglas Fir bears South 37° West, a distance of 66.70 feet, marked T4S R38E 1/4 S4 BT.
- A 20" Ponderosa Pine bears North 4° West, a distance of 50.00 feet, marked T3S R38E 1/4 S33 BT.

I hereby certify that the corner was set July 12, 2002
Witnesses: Greg T. Blackman Jr. & Norbert Volny

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Greg T. Blackman Jr.
OREGON
JULY 13, 1972
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

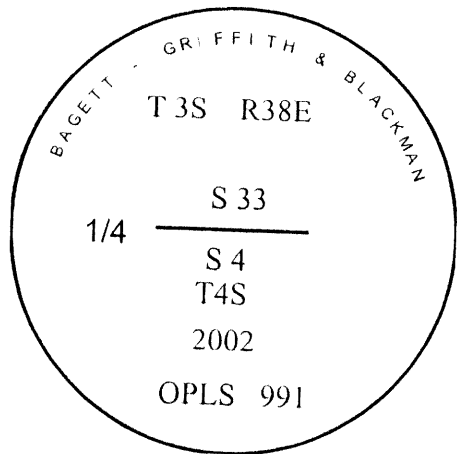

**UNION COUNTY
SURVEYOR**

Date Received 7/19/02

Date Filed 7/19/02

Filed By R. ROBINSON, Deputy

File Number 010-2002K

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 991 to the BT