


RECOVERY NOTES
BOISE CASCADE CORP.
PROPERTY CORNER INVESTIGATION

C-9
LOCATION



T. 45 R. 33E
Mer. State
Forest Dist.
Compartment or Tract

LEGEND

- Corner searched-no evidence
- Corner or accessory found
- Corner marked by perm. mon.

DESCRIPTION OF FOUND CORNER

MATERIAL: Rocks SIZE: 12x12x4
HEIGHT ABOVE GROUND: 3.1m CONDITION: Good
MARKINGS: _____

DESCRIPTION OF FOUND ACCESSORIES

*Small mound of rocks with larger
on center. Painted red*

Note: Indicate full investigative details on back of form and where
cruise tag placed in reference to corner.

PHOTO IDENTIFICATION

Symbol & date _____ Line or Roll _____ Exposure _____
How Identified _____ Where filed _____

RECOVERED BY: RLM
DATE: 9-26-68 TITLE: _____

UNION COUNTY
SURVEYOR

Date Received 1-4-88

Date Filed 1-7-88

By G. LANGLITZ, DEPUTY

File No. 14-88R

C-9

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by W. B. Barr, under GLO Contract Number 388, dated May 7, 1881. Surveyor General record states:

- Set Basalt Rock 14"x12"x5"
- A 3" Black Pine bears S 68°E, 6 lks.
- A 12" Black Pine bears S 58° W, 14 lks.

No record of subsequent monumentation found in the Union County monumentation records

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found

See Survey Number 026-2002



DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned position, I set a 2½"x30" aluminum monument, marked as shown, 28 inches in the ground, and raised a mound of stone with a 2 foot base to the top of the cap, from which


NEW BEARING TREES:

- A 15" diameter Douglas Fir bears North 22° East, a distance of 69.90 feet marked X BT.
- A 13" diameter Douglas Fir bears South 42° East, a distance of 53.60 feet, marked 1/4 S4 BT.
- A 12" diameter Douglas Fir bears North 88° West, a distance of 18.85 feet, marked 1/4 S5 BT.
- A 15" diameter Douglas Fir bears North 32° West, a distance of 86.50 feet, marked X BT.

I hereby certify that the corner was monumented on June 27, 2002
Witness: Rick Robinson and Gregory T. Blackman Jr.

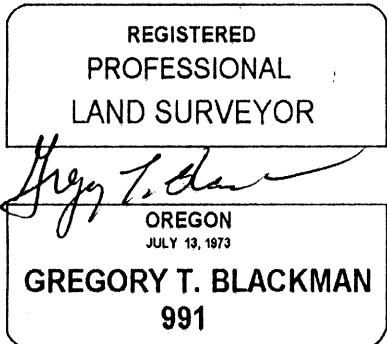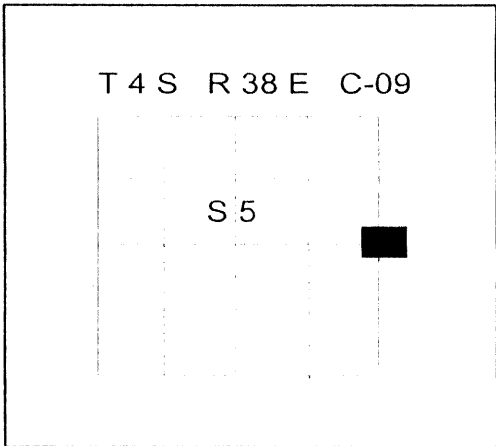

Renewal Date: December 31, 2003

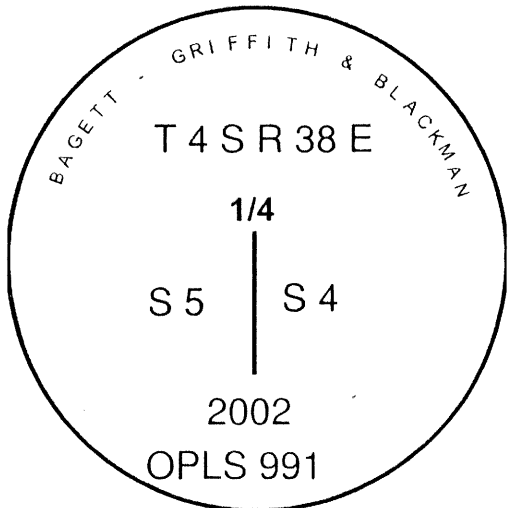

UNION COUNTY SURVEYOR

Date Received 7/19/02

Date Filed 7/19/02

Filed By R. Robinson, Deputy

File Number 018-2002R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 991 to the BT blaze.

C-09

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017024

1/4 SECTION CORNER COMMON TO SECTIONS 4 AND 5

TWP. 4 S RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October 20, 2017

LAT: 45 ° 14 ' 44.59427 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 4 ' 32.75767 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 585044.894 INT FT.

E: 8826364.735 INT FT.

TYPE: GPS

THETA: 1 ° 43 ' 9.23822347 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9998954828

ELEV: 5227.36 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum pipe with 2 1/2" aluminum cap marked as shown, set in mound of stone.

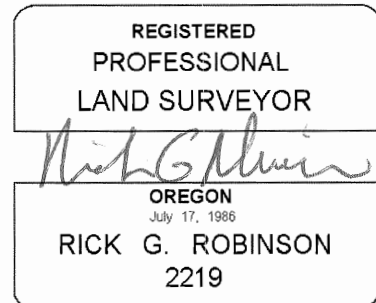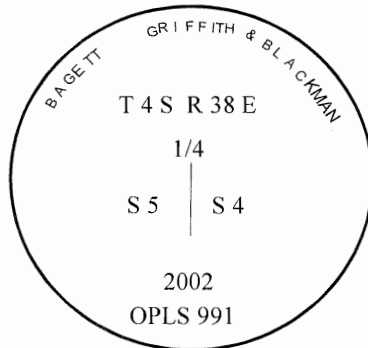

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)