


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established.

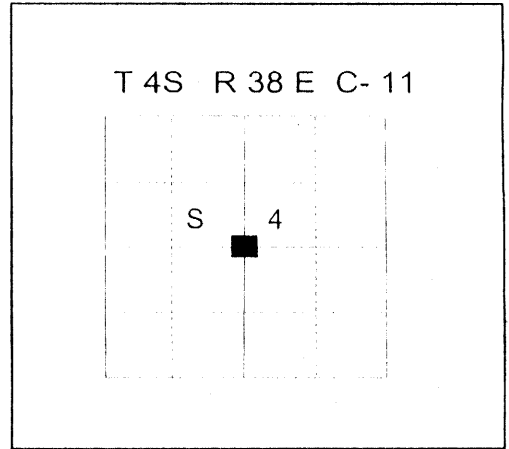

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Survey Number 026-2002.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 5/8"X30" iron pin with 2 1/2" aluminum cap marked as shown below, 30" in the ground, from which:

NEW BEARING TREES:

A 7" diameter White Fir bears N 21°E, a distance of 20.00 feet, marked X BT.

A 17" diameter White Fir bears S 8°E, a distance of 9.30 feet, marked C 1/4 S4 BT.


A 7" diameter Ponderosa Pine bears S 88°W, a distance of 50.50 feet, marked X BT.

A 17" diameter Douglas Fir bears N 5°W, a distance of 21.15 feet, marked C 1/4 S4 BT.

I hereby certify that the corner was monumented on July 17, 2002

Witnesses: Norbert Volny and Greg Blackman, Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

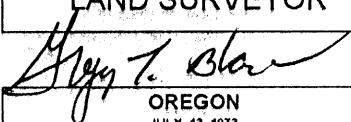

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

BAGETT - GRIFFITH & BLACKMAN

T 4 S R 38 E

C 1/4

•

S 4

2002

OPLS 991

**UNION COUNTY
SURVEYOR**

Date Received 7/19/02

Date Filed 7/19/02

Filed By R. ROBINSON, DEPUTY

File Number 019-2002R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distance to the bearing trees is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.