

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**


Corner originally established by W. B. Barr, under GLO Contract Number 388, dated May 7, 1881. Surveyor General record states:  
Set Lava Rock 12"x12"x6"  
A 8" Pine bears N 42°W, 48 lks.

No record of subsequent monumentation found in the Union County monumentation records

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

No original evidence found

See Survey Number 026-2002

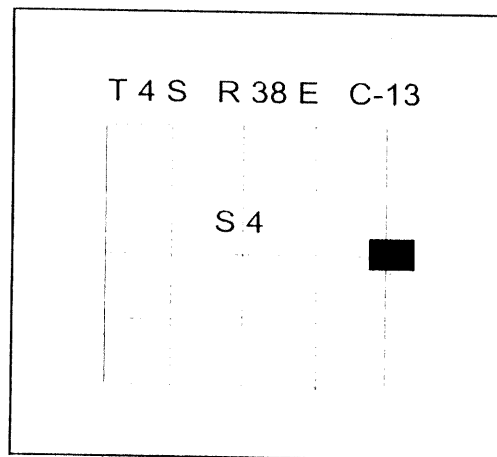

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the proportioned position, I set a 2½"x30" Aluminum Cap, marked as shown, 8 inches in the ground, and raised a mound of stone with a 3½ foot base to the top of the cap, from which

**NEW BEARING TREES:**

A 10" diameter Ponderosa Pine bears North 1° East, a distance of 79.18 feet marked 1/4 S3 BT.

A 7" diameter Ponderosa Pine bears South 29° East, a distance of 52.24 feet, marked X BT.

A 9" diameter Ponderosa Pine bears South 36° West, a distance of 23.23 feet, marked X BT.


A 12" diameter Ponderosa Pine bears North 73° West, a distance of 52.75 feet, marked 1/4 S4 BT.

I hereby certify that the corner was monumented on July 15, 2002  
Witness: Rick Robinson.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

Renewal Date: December 31, 2003

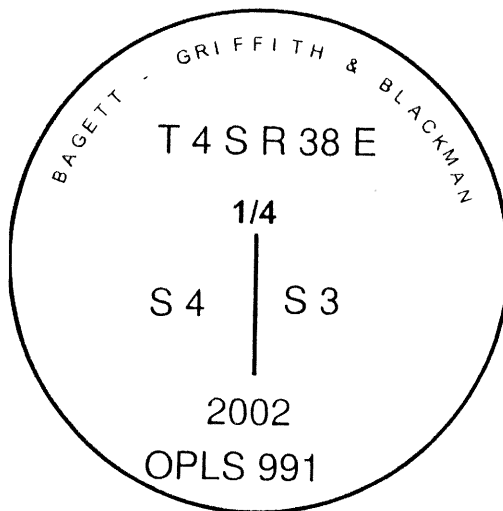

**UNION COUNTY SURVEYOR**  
Date Received 7/19/02  
Date Filed 7/19/02  
Filed By R. ROBINSON, DEPUTY  
File Number 020-2002R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 991 to the BT blaze.