


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 388, dated May 7, 1881. Surveyor General record states: Marked volcanic rock 20x14x10 for ¼ sec corner raised mound of rock as per instructions.
 Corner found by J.W. Kimbrell, in 1887 on survey recorded on page 33 of the old book of surveys. The survey states: "Found stone in mound of stone".
 Corner found on survey number 37-77 by Howard Perry. His survey states "Found stone marked ¼".
 Corner found on survey number 46-77 by Howard Perry. His survey states "Found rock".

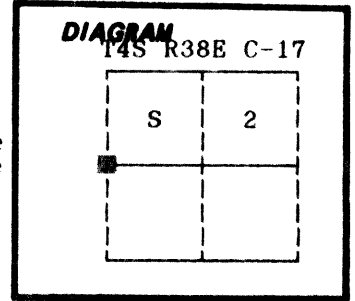

Corner found and accessories taken on survey number 32-89 by Bob Stratton. His map states: "Found basalt stone 12"x12"x7" above ground with ¼ on West. 24"x30"x26" rock with arrow chiseled on top N29°E, 9.36 feet 18"x14"x3" rock with arrow chiseled on top S19°E, 7.55 feet 18"x18"x1" rock with arrow chiseled on top S64°W, 20.30 feet 20"x18"x20" rock with arrow chiseled on top N51°W, 11.62 feet
 No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a stone 12x12x20 inches marked with a ¼ on the West face, firmly set 12 inches in the ground.

- Found a 24"x30"x26" high rock with arrow chiseled on top N29°E, 9.36 feet.
- Found a 18"x14"x3" high rock with arrow chiseled on top S19°E, 7.55 feet.
- Found a 18"x18"x1" high rock with arrow chiseled on top S64°W, 20.30 feet.
- Found a 20"x18"x20" high rock with arrow chiseled on top N51°W, 11.62 feet.

(Bearings based on Union County Survey number 32-89)

Distances taken from the point of the chiseled arrow.

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of the found corner stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground.




No new bearing objects taken.

Buried the corner stone North and alongside of the monument.

Raised a mound of stone 3 ft. base to top of cap.

I hereby certify that the above corner point was perpetuated as hereon described on December 28, 1989.

Witness: Rick Robinson

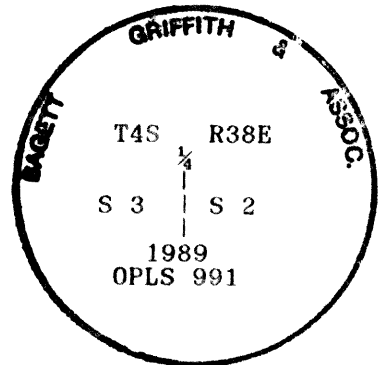

UNION COUNTY SURVEYOR

Date Received 12-29-89

Date Filed 12/29/89

By R. Robinson Deputy

File No. 276-89R

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200611

1/4 SECTION CORNER COMMON TO SECTIONS 2 and 3

TWP. 4 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October 12, 2006

LAT: 45 ° 14 ' 44.86463 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 2 ' 6.00954 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 585389.884 INT FT.

E: 8836857.653 INT FT.

TYPE: GPS

THETA: 1 ° 44 ' 53.309951 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998954846

ELEV: 2880.67 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 2 1/2" aluminum pipe with
2 1/2" aluminum cap marked:

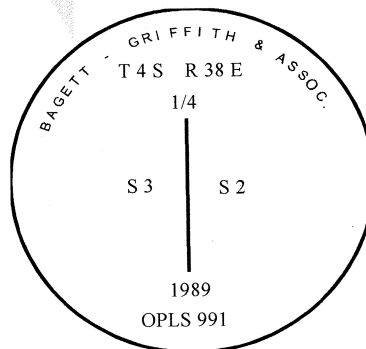

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Rick G. Robinson

OREGON
July 17, 1986

**RICK G. ROBINSON
2219**

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)