

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original Subdivision Survey of T4S R38E performed by W.B. Barr under Contract No. 388 dated May 7, 1881:

Set stake 4 ft. long, 4 in. diam., 18 in. in the ground for Corner to Sec. 4, 5, 8, 9 from which:


- Spruce 3 in. diam. bears N43°W 4 lks. dist.,
- Black Pine 6 in. diam. bears N68°E 6 lks. dist.,
- Black Pine 3 in. diam. bears S31°W 5 lks. dist.,
- Black Pine 10 in. diam. bears S12°E 19 lks. dist.

E-9

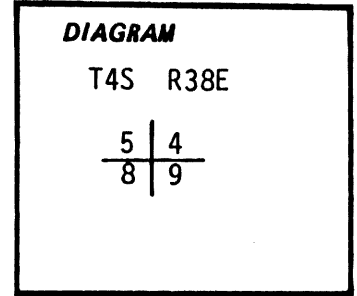

Description of corner evidence found:

Found the original N.E. bearing tree, an 8" Lodgepole Pine, dead, leaning and supported by nearby tree, with scribing "R38E T4S S4 BT" visible on an unhealed double blaze. No evidence was found of the remaining original bearing trees or of the original corner post.

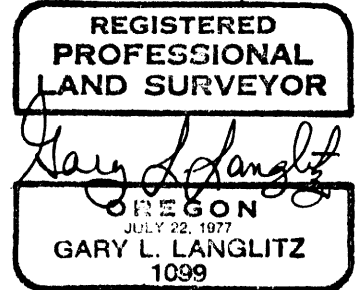

Description of monument and accessories established to perpetuate the original location of this corner:

At the corner point determined by reference to the standing position of the original N.E. bearing tree, we set a 2"x30" aluminum pipe, 28" in the ground, with aluminum cap, marked:

T4S R38E
S5 | S4
S8 | S9
PLS 1099
1984

From which:

The original N.E. bearing tree, an 8" Lodgepole Pine Snag, previously described, bears N68°E 4.0 feet to face of blaze, (4.3 feet to center of standing position of tree),

And new BT's marked on this date:

A 12" Englemann Spruce, scribed "T4S R38E S4 BT" on a double blaze bears N4°E 17.9 feet,

A 16" Englemann Spruce, scribed "T4S R38E S5 BT" on a double blaze bears N78°W 29.5 feet,

An 18" Englemann Spruce, scribed "T4S R38E S8 BT" on a double blaze bears S55°W 6.7 feet,

And an 8" Englemann Spruce, scribed "T4S R38E S9 BT" on a double blaze bears S28°E 13.3 feet.

Attached brass washer marked "LS 1099" to lower blaze of new BT's.
Magnetic Compass (20° East Declination)

Steel Tape

Corner is located in an old and down E-W fenceline.
October 24, 1984

Witnesses:
Gary Langlitz
M.R. Humiston

**UNION COUNTY
SURVEYOR**

Date Received 11-13-84

Date Filed 11-13-84

By G. LANGLITZ, DEPUTY

File No. 1031-84 R

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017023

SECTION CORNER COMMON TO SECTIONS 4, 5, 8 AND 9

TWP. 4 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October 20, 2017

LAT: 45 ° 14 ' 18.64666 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 4 ' 32.69096 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 582418.427 INT FT.

E: 8826448.345 INT FT.

TYPE: GPS

THETA: 1 ° 43 ' 9.2855391 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998953221

ELEV: 5178.37 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum pipe with 2 1/2" aluminum cap marked as shown.

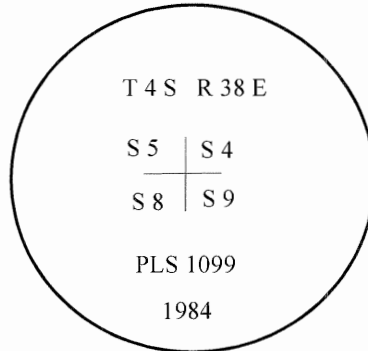

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)