

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**


Corner established by Linda Lee Miller in Survey 042-1993. Survey states:

At position determined by survey, set monument from which:

A 14" fir bears N11°37'E 38.9 ft.

A 20" fir bears S88°55'E 22.2 ft.

T 4 S R 38 E G-11

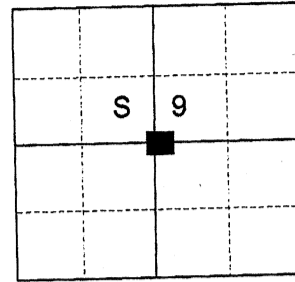

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None. Corner set by 042-1993 appears to have been removed.


SEE SURVEY NUMBER 028-2024

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 2 1/2" aluminum pipe, 28" in the ground, with a 3" aluminum cap marked as shown below, in a 3 ft. diam. mound of stone, from which:

**NEW BEARING OBJECTS:**

- An 11" White Fir bears North 51° East, a distance of 35.95 feet, marked C 1/4 S9 BT.
- A 10" Ponderosa Pine bears South 32° East, a distance of 7.70 feet, marked C 1/4 S9 BT.
- An 8" Ponderosa Pine bears South 46° West, a distance of 20.15 feet, marked C 1/4 S9 BT.
- An 11" Ponderosa Pine bears North 46° West, a distance of 4.65 feet, marked C 1/4 S9 BT.

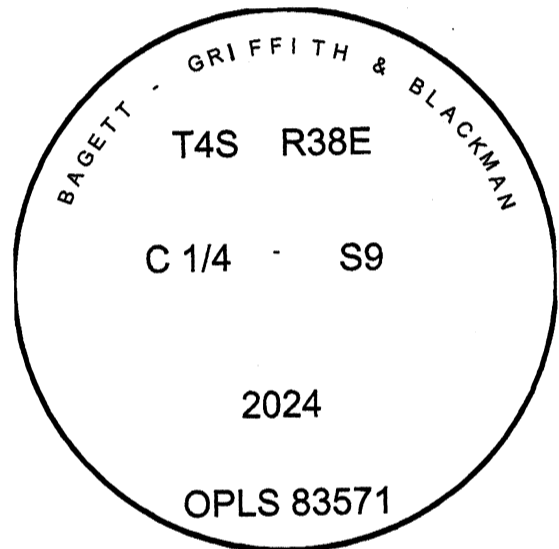

Set steel fencepost 1 ft. North

I hereby certify that the corner was monumented on August 8th, 2024

Witnesses: Kyle Tucker, Adam Gordon



Renewal Date: June 30, 2025

I use a tape and compass in the establishment of the new bearing objects. I use 14° East declination. Bearings are measured to a brass washer labeled "OPLS 83571" in the BT blaze at the base of the tree. Distances are to a 60D nail in the right side of the base of the center of the tree.

