


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by William B. Barr under GLO contract Number 388, dated May 7, 1881. Surveyor General record states:

Set stake for quarter corner from which;

- A Tamarack 16 ins. dia. bears S 57°W, 39 lks.
- A Tamarack 12 ins. dia. bears N 35°E, 66 lks.

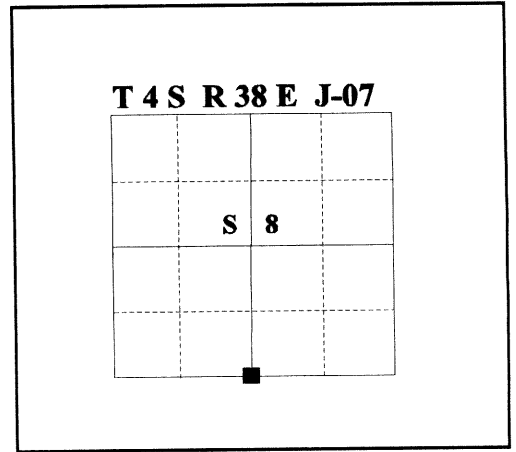

No record of subsequent monumentation found in Union County survey records.  
**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found 2" X 1½" piece of track, bent, driven into the ground.

There are possible stump holes at record bearing and distance, too vague to be sure.

There is a fence corner S55°W, 7 feet more or less, with fences N & W. This fence is quite new. There is evidence of an old fence which ran through the track position.

See map of Survey No. 037-1995, filed in the office of the Union County Surveyor.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

NONE, this is filed for information only.

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>12-26-95</u>
Date Filed	<u>12-29-95</u>
Filed By	<u>R. ROBINSON, Deputy</u>
File Number	<u>047-1995 R</u>

