


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-13

History of original corner establishment:

The original notes read;  
Set basalt stone 16x10x4 for corner to sec. 9,10,15,16 from which;  
A tamarack 15" in diam bears S18°E 18 lks dist.;  
A black pine 15" in diam bears S34°W 87 lks dist.;  
A fir 15" in diam bears N°5°E 34 lks dist.;  
A pine 36" in diam bears N45°W 6 lks dist.;

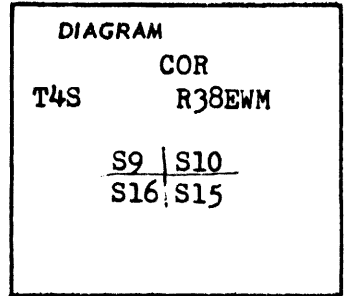

Description of corner evidence found:


The bearing trees in sections 9 and 10 are reversed in original notes.  
at N45°E found fir stump  
at N5°E found pine log with scribe;  
The marked stone was found at the corner.;

Description of monument and accessories established to perpetuate the original location of this corner

At the position of the corner I set a 2" pipe 30" long with brass cap on top and placed the marked stone along side.;  
From the corner the following bearing trees were set; A red fir 12" in diam bears N23°30'W a dist of 116.2 ft.; scribed T4S, R38E S9BT;  
A white fir 10" in diam bears S21°30'W a dist of 13.5ft. scribed T4SR38ES16BT;  
A 16" white fir bears N46°30'E a dist of 157ft scribed T4SR38ES10BT;  
A white fir 12" in diam bears S28°E a dist. of 54.5 ft. scribe T4S R38ES15BT;  
All distances measured to BT along surface of ground;

UNION COUNTY SURVEYOR  
Received \_\_\_\_\_  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_  
File No. 523-84R

I stamped the disk

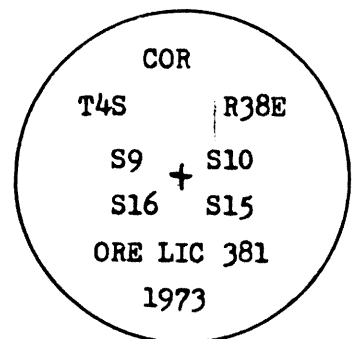

Office of County surveyor County of Union  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 26 day of Sept, 19 73, at 2 o'clock P.m., (signed) \_\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
MAY 4, 1956  
JAMES G. VOELZ  
381