


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX FILE No. J-23

History of original corner establishment:

Original survey by W. Barr, 1881, states:

Marked basalt rock 14x12x4 for 1/4 Sec. Corner.  
Raised mound of rock as per instructions.

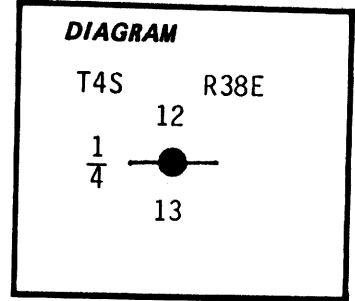

Description of corner evidence found:

None. Refer to survey filed concurrently with this record.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2"x30" Galvanized Iron Pipe at corner point determined by survey, 20" in the ground to bedrock on a rocky SW slope, with brass cap attached, marked:

T4S R38E

$\frac{1}{4}$   $\frac{S12}{S13}$

PLS 1099  
1099

From which we mark the following bearing objects.

An "+B0" chiseled on a vertical bedrock face near the middle of an outcrop (20 ft. wide and 3 ft. high) bears N 8 1/2° E 72.7 ft.

And an "+B0" chiseled at the NW end of an exposed bedrock outcrop (4 ft. high) bears S49°E 88.4 ft.

Compass declination 20° East

Placed fencepost with "ATTENTION" sign attached alongside monument.

Witnesses: Gary L. Langlitz PLS1099  
David Allen



Office of Surveyor County of Union  
 State of Oregon I hereby certify that the within instrument was filed in this office  
 for record on the 29 day of OCTOBER, 1981  
Howard L. Perry by Gary Langlitz  
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received 10-29-81  
 Date Filed 10-29-81  
 By 525-84R  
 File No. J-23