


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-5

History of original corner establishment:

The original note read;
Marked black pine 12" in diam for $\frac{1}{4}$ sec cor.
from which ;
A black pine 8" in diam bears N80°E 22 lks.
A black pine 8" in diam bears N24°W 25 lks.;



Description of corner evidence found:


The black pine marked $\frac{1}{4}$ s for the corner was found down and scribe visible.
Found the stump as indicated in sec. 20; no scribe found;
At N24°W 25 lks the downed tree was found with scribe.;

Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 2" galvanized pipe with a brass cap on top to a depth of approx. 24" from which the following bearing trees were set.;

A whitefir 9" in diam bears S31°W 10.8 feet marked $\frac{1}{4}$ SBT;
A white fir 12" in diam bears S48°E 48.0 feet marked $\frac{1}{4}$ SBT'

I stamped the disk

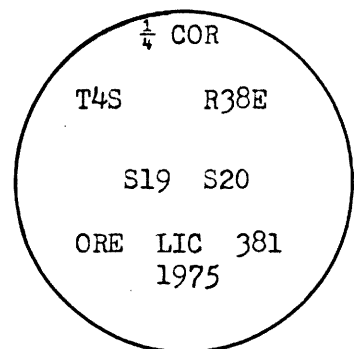

Office of County surveyor County of Union
 State of I hereby certify that the within instrument was filed in this office
 for record on the day of; 19....., at o'clock m., (signed)
 by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
By	_____
File No.	532-84 R