

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by W.B. Barr under GLO Contract Number 388, dated May 7, 1881.


Surveyor General record states:

Marked basalt rock 16x7x6 for Cor to Secs 22, 23, 26, 27 from which:

Mahogany 8 in diam bears N71°E 26 lks dist

Mahogany 7 in diam bears N8°W 138 lks dist

T 4 S R 38 E R-17



No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found mound of stone with stone 15x8x5. Unable to distinguish marks on Stone. Found an 8" Mahogany N 71°E 17 ft. dead and down with no scribed visible. Found an 8" Mahogany N 8° W 91 ft. dead and standing. Opened and found no scribes. Possibility the Mahoganies were bark scribed.

See Survey No. 015-2003

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position of the mound of stone, I set a 2 ½" x 30" aluminum pipe with aluminum cap marked as shown below, 27" in the ground to bedrock, from which:

New Bearing Trees and Object:

A 12 inch diameter Ponderosa Pine bears N 36°E, a distance of 71.43 feet, marked T4S R38E S23 BT

A 14 inch diameter Ponderosa Pine bears S 34°E, a distance of 84.71 feet, marked T4S R38E S26 BT

A 5/8" x 30" iron pin with 1 ½" aluminum cap bears S 11°W, a distance of 16.18 feet, marked BGB SURVEY MARKER S27 RP.

A 17 inch diameter Ponderosa Pine bears N 18°W, a distance of 130.73 feet, marked T4S R38E S22 BT

Set a steel fence post approximately 3 ft. South of monument.

Raised mound of stone around monument, 3 ft. base to top of cap.

Buried stone North and alongside of monument.

I hereby certify that the corner was monumented on May 15, 2003.


**UNION COUNTY SURVEYOR**

Date Received 5/22/03

Date Filed 6/14/03

Filed By [Signature]

File Number 015-2003R

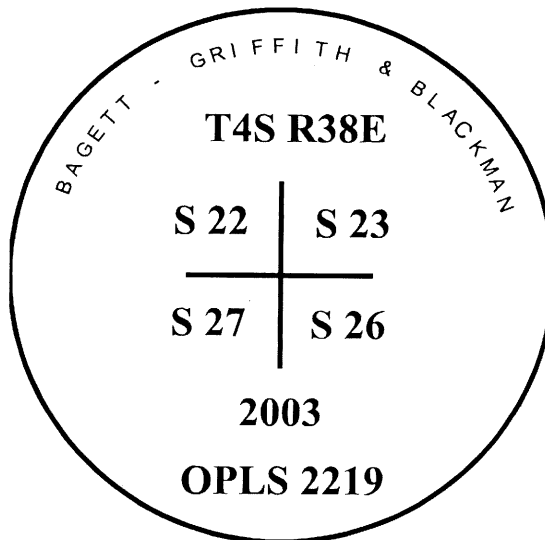

**REGISTERED PROFESSIONAL LAND SURVEYOR**

[Signature]

OREGON  
July 17, 1986  
**RICK G. ROBINSON**  
2219

I used a steel tape and magnetic compass in the establishment of these accessories. I used a magnetic declination of 18° East. The distance is to the center of a 5/8"x30" iron pin with 1 ½" aluminum cap, and the distances to the bearing trees are to a 50d spike driven on the right side of the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.