


UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by W.B. Barr under GLO Contract Number 388, dated May 7, 1881. Surveyor General record states: Set stake for Cor to Secs 23, 24, 25, 26 and raised mound of rock as per instructions.

T 4 S R 38 E R-21

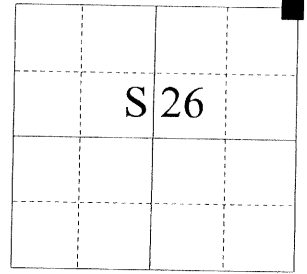

Corner was visited by Arthur Curtis during survey dated October 17, 1898 recorded in the old book of surveys on page number 339. His record states: The Sec Cor to Secs 23,24,25,26.

Survey Number 76-81 by Gary Langlitz calls the corner position as the fence corner and shows a bearing and distance from the monumented 1/4 corner to the North.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner. Found the existing fence lines to fit the record information of survey number 76-81 and accept their intersection as the best available evidence of the original corner position.

See Survey No. 015-2003

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position of the intersection of the existing fences, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown below, 28" in the ground, from which:

New Bearing Objects:

- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N 77°13' W, a distance of 27.97 feet, marked BGB SURVEY MARKER S24 RP.
 - A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 8°46' E, a distance of 17.12 feet, marked BGB SURVEY MARKER S25 RP.
 - A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 59°01' W, a distance of 38.73 feet, marked BGB SURVEY MARKER S26 RP.
 - A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N 51°01' W, a distance of 45.06 feet, marked BGB SURVEY MARKER S23 RP.
- Raised mound of stone around monument, 3 ft. base to top of cap.

I hereby certify that the corner was monumented on May 15, 2003.


UNION COUNTY SURVEYOR

Date Received 5/22/03

Date Filed 6/14/03

Filed By M. G. Robinson

File Number 017-2003R

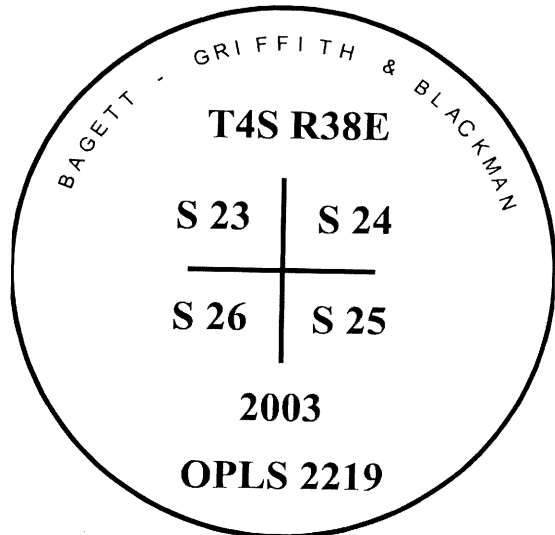

REGISTERED PROFESSIONAL LAND SURVEYOR

M. G. Robinson

OREGON
July 17, 1986

RICK G. ROBINSON
2219

I used a Leica 530 GPS unit in the establishment of the new accessories. The Basis of Bearing is the same as map of survey number 015-2003. The distances are to the center of a 5/8"x30" iron pin with 1 1/2" aluminum cap.