

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

2-12

T-1

History of original corner establishment:

Corner established in 1863 by Timothy W. Davenport under General Land Office Contract No. 102.


Surveyor General Record states:

Set post for corner from which;

A red fir 18 in. dia. bears West 9 links

A red fir 5 in. dia. bears N30E, 11 links

Retracement removed scribes from BT West of range line

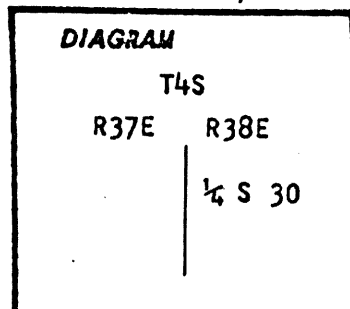

Retraced in 1881 by W.B. Barr under General Land Office Contract No. 388.

No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

NONE

See map of survey dated June 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2 1/2 inch x 30 inch iron pipe with brass cap marked as shown, 24 inches in the ground from which;


NEW BTs

A 10 in. dia. fir bears S88E, 21.7 feet marked 1/4 S30 BT

A 6 in. dia. fir bears S31E, 22.9 feet marked X BT

The East 1/4 corner of Section 25 bears North 102.95 feet

Raised mound of stone

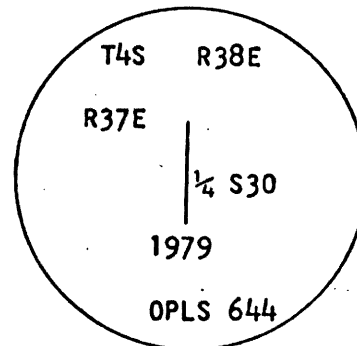

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 12, 1954
DUANE I. GRIFFITH
544

Brass washer nailed to B.T. blaze.
Used steel tape and magnetic compass with 18° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed ☆ GPO-700-270 _____

By _____

File No. 536-84R