


UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by W.B. Barr under GLO Contract Number 388, dated May 7, 1881. Surveyor General record states:

T 4 S R 38 E T-21

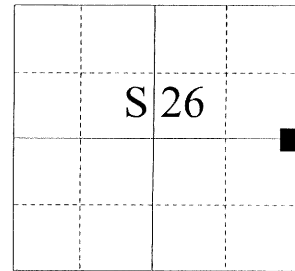

Marked basalt rock 14x10x10 inches for 1/4 Sec Cor. From Which;
Cottonwood 3 in diam bears N55½°E, 86 lks
Pine 30 in diam bears S12°W, 127 lks

Corner was remonumented by Arthur Curtis during survey dated October 17, 1898 recorded in the old book of surveys on page number 339. His record states: Set marked stone for 1/4 Sec Cor

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of original monument or its accessories, or of the Curtis stone.

See Survey No. 015-2003

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 2 ½" x 30" aluminum pipe with aluminum cap marked as shown below, 24" in the ground, from which:

New Bearing Objects:

- A 5/8" x 30" iron pin with 1 ½" aluminum cap bears N 55°E, a distance of 19.54 feet, marked BGB SURVEY MARKER NE RP. (Set at base of 10" aspen)
- A 5/8" x 30" iron pin with 1 ½" aluminum cap bears S 74°E, a distance of 15.16 feet, marked BGB SURVEY MARKER SE RP. (Set at base of 8" aspen)
- A 5/8" x 30" iron pin with 1 ½" aluminum cap bears S 54°W, a distance of 13.33 feet, marked BGB SURVEY MARKER SW RP.
- A 5/8" x 30" iron pin with 1 ½" aluminum cap bears N 61°W, a distance of 9.48 feet, marked BGB SURVEY MARKER NW RP. (Set at base of 8" aspen)

I hereby certify that the corner was monumented on May 13, 2003.


UNION COUNTY SURVEYOR

Date Received 5/22/03

Date Filed 6/14/03

Filed By [Signature]

File Number 019-2003R

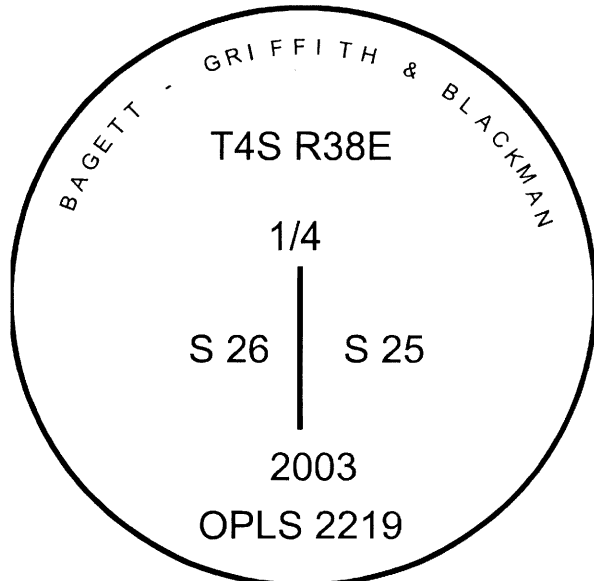

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]
OREGON
July 17, 1986
RICK G. ROBINSON
2219

I used a steel tape and magnetic compass in the establishment of these accessories. I used a magnetic declination of 18° East. The distances are to the center of a 5/8"x30" iron pin with 1 ½" aluminum cap.

Renewal Date December 31, 2004