


UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by W.B. Barr under GLO Contract Number 388, dated May 7, 1881. Surveyor General record states: Marked basalt rock 12x10x8 for Cor to Secs 25, 26, 35, 36 from which:
Pine 30 in diam bears N70°E 9 lks dist
Pine 18 in diam bears N35°W 47 lks dist
Pine 18 in diam bears S17°W 52 lks dist
Pine 20 in diam bears S 20°E 22 lks dist

T 4 S R 38 E V - 21



Corner was visited by Arthur Curtis during survey dated October 17, 1898 recorded in the old book of surveys on page number 339. His record states: The Sec Cor to Secs 25, 26, 35, 36

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner stone, or its' accessories. Area has been logged long ago, taking all pine in the area.

See Survey No. 015-2003

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 2 ½" x 30" aluminum pipe with aluminum cap marked as shown below, 27" in the ground, from which:

New Bearing Trees and Objects:

- A 14 inch diameter Douglas Fir bears N 37°E, a distance of 49.30 feet, marked T4S R38E S25 BT
 - A 16 inch diameter Douglas Fir bears S 76°E, a distance of 48.67 feet, marked T4S R38E S36 BT
 - A 5/8" x 30" iron pin with 1 ½" aluminum cap bears S 36°W, a distance of 10.02 feet, marked BGB SURVEY MARKER S35 RP.
 - A 5/8" x 30" iron pin with 1 ½" aluminum cap bears N 25°W, a distance of 8.16 feet, marked BGB SURVEY MARKER S26 RP.
- Set a steel fence post approximately 1 ft. North of monument.
Raised small mound of stone around monument.

I hereby certify that the corner was monumented on May 13, 2003.


UNION COUNTY SURVEYOR

Date Received 5/22/03

Date Filed 6/14/03

Filed By [Signature]

File Number 025-2003 R

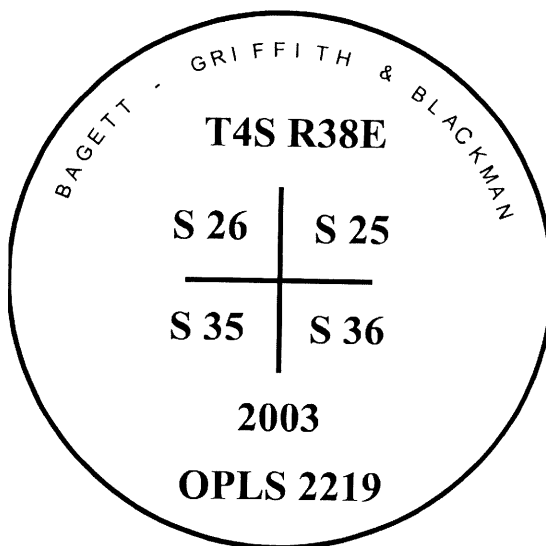

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]
OREGON
July 17, 1986
RICK G. ROBINSON
2219

I used a steel tape and magnetic compass in the establishment of these accessories. I used a magnetic declination of 18° East. The distances are to the center of a 5/8"x30" iron pin with 1 ½" aluminum cap, and the distance to the bearing trees are to a 50d spike driven on the right side of the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.