

UNION COUNTY SURVEYOR


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by W.B. Barr under GLO Contract Number 388, dated May 7, 1881. Surveyor General record states:

T 4 S R 38 E V - 23

Marked basalt rock 14x12x8 inches for 1/4 Sec Cor.
Raised mound of rock as per instructions



No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found stone 14x12x7 inches centered in a well defined mound of stone. No marks visible on stone.

See Survey No. 015-2003

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position of the stone, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown below, 27" in the ground, from which:

New Bearing Tree and Objects:

- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N 14°43'E, a distance of 17.08 feet, marked BGB SURVEY MARKER NE RP.
- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 86°11'E, a distance of 15.62 feet, marked BGB SURVEY MARKER SE RP.
- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 27°28'W, a distance of 50.26 feet, marked BGB SURVEY MARKER SW RP.
- A 10 inch diameter Ponderosa Pine bears N 80°W, a distance of 69.62 feet, marked 1/4 S25 BT.

Buried stone North and alongside monument.

Raised mound of stone around monument, 2 ft. base to top of cap.

I hereby certify that the corner was monumented on May 13, 2003.


UNION COUNTY SURVEYOR

Date Received 5/22/03

Date Filed 6/11/03

Filed By [Signature]

File Number 026-2003 R

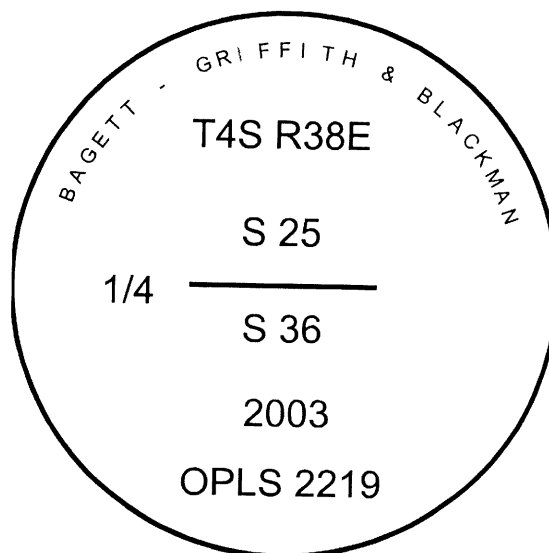

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]
OREGON July 17, 1986
RICK G. ROBINSON
2219

I used a Leica 530 GPS unit in the establishment of the new accessories. The Basis of Bearing is the same as map of survey number 015-2003. The distances are to the center of a 5/8"x30" iron pin with 1 1/2" aluminum cap. The bearing and distance to the bearing tree was taken with a magnetic compass and steel tape. I used a magnetic declination of 18° East, and the distances are to a 50d spike driven on the right side of the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.

Renewal Date December 31, 2004