


W-2

History of original corner establishment:  
Corner not established in original survey.

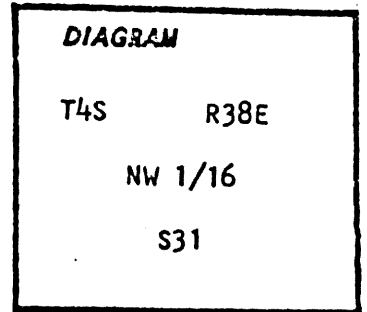

No record of subsequent remonumentation found in County records.  
Description of corner evidence found:

None

See map of survey dated June 1980


Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance I set a 2 1/2" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

A 10 in. dia. fir bears S36W, 33.5 feet marked NW 1/16 S31 BT

A 10 in. dia. tamarack bears N85W, 56.2 feet marked NW 1/16 S31 BT

Raised mound of stone

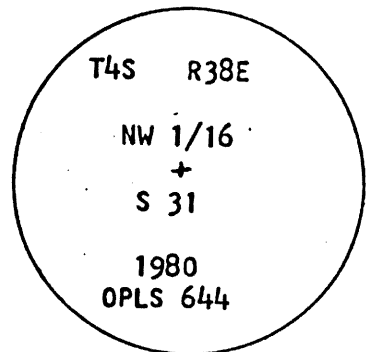

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Doane L. Griffith*  
OREGON  
JULY 19, 1984  
DOANE L. GRIFFITH  
854

Brass washer nailed to B.T.blaze  
Used steel tape and magnetic compass  
with 18 East declination.  
Measured to center of all B.T.s

Office of..... County of.....  
State of..... I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY  
SURVEYOR

Date Received \_\_\_\_\_

GPO-798-276

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 542-84R