


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established.

T 4 S R 38 E W - 20

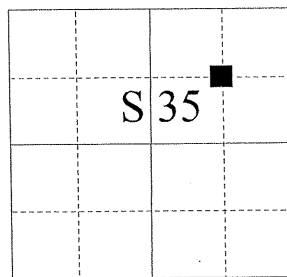

DESCRIPTION OF CORNER EVIDENCE FOUND:
None

See Survey No. 036-2013

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 15" iron pin with 2 1/2" aluminum cap, marked as shown below, 13" in the ground, in a collar of stone 2 ft. diam., from which,


A 12 inch Ponderosa Pine bears North 89° East, a distance of 19.50 feet,
marked NE 1/16 S35 BT.

A 27 inch Ponderosa Pine bears North 23° West, a distance of 37.40 feet,
marked NE 1/16 S35 BT.

I hereby certify that the corner was monumented on August 13, 2013.

REGISTERED
PROFESSIONAL
LAND SURVEYOR
[Signature]
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

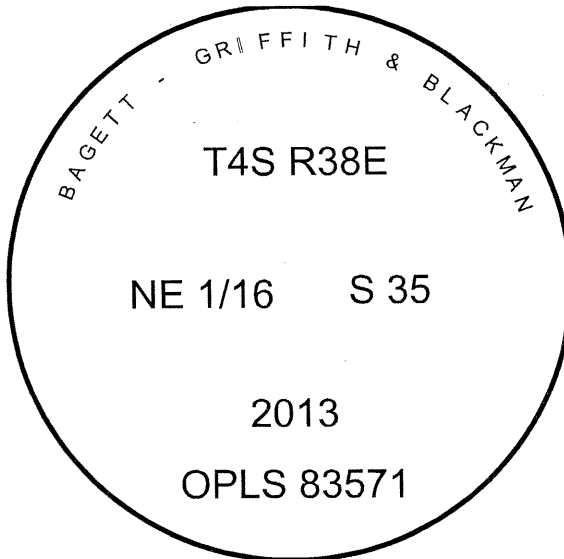

UNION COUNTY
SURVEYOR
Date Received 8/14/13
Date Filed 8/14/13
Filed By *[Signature]*
File Number 428-2013R

I used a magnetic compass and steel tape in the establishment of the bearing trees. Magnetic declination used was 16° East. Distances are to a steel spike set in the right hand side of the root crown of the bearing trees.