

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-10

X-1

History of original corner establishment:

Corner established in 1863 by Timothy W. Davenport under General Land Office Contract No. 102.


Surveyor General Record states:

Set post for corner from which;

A tamarack 20 in. dia. bears S80W, 10 links

A spruce 8 in. dia. bears N65E, 23 links

Retracement calls removing scribes from BT on the West side of range line.

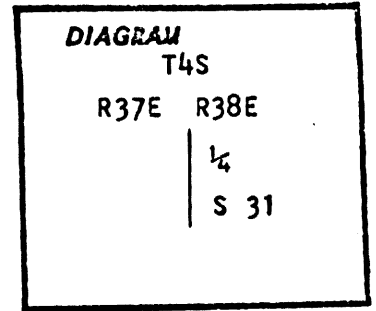

Retraced in 1881 by W.B. Barr under General Land Office Contract No. 388.

No record of subsequent remonumentation was found in County records.  
Description of corner evidence found:

NONE

See map of survey dated June 1980


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance, I set a 2 1/2 inch x 30 inch iron pipe with brass cap marked as shown, 27 inches in the ground from which;

A 7 in. dia. fir bears N58E, 8.5 feet marked X BT

A 10 in. dia. fir bears S25E, 24.8 feet marked 1/4 S31 BT

The East 1/4 corner of Section 36, T4S R37E, bears North 33.3 feet

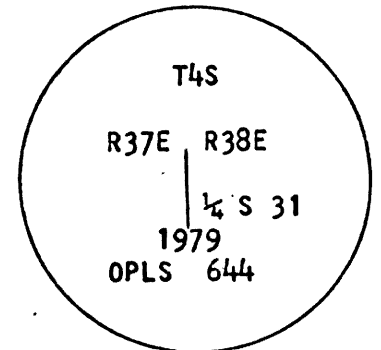

REGISTERED PROFESSIONAL LAND SURVEYOR

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
544

Brass washer nailed to B.T. blaze.  
Used steel tape and magnetic compass with 18 East declination.  
Measured to center of all B.T.s

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 543-84R

GPO-700-276