


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-37

x-2

History of original corner establishment:
Corner not established in original survey.

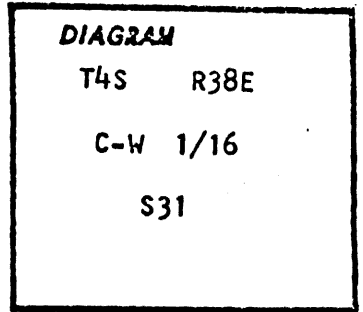

No record of subsequent remonumentation found in County records.
Description of corner evidence found:

None


See map of survey dated June 1980

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

A 19 in. dia. tamarack bears S85E, 17.4 feet, marked CW 1/16 S31 BT

A 10 in. dia. fir bears S8W, 35.3 feet, marked CW 1/16 S31 BT

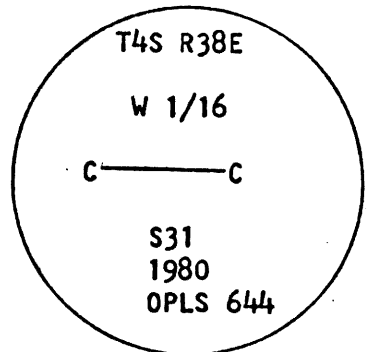

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane L. Griffith
OREGON
JULY 17, 1961
DUANE L. GRIFFITH
824

Brass washer nailed to B.T.blaze
Used steel tape and magnetic compass
with 18 East declination.
Measured to center of all B.T.s

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

UNION COUNTY
SURVEYOR

Date Received _____
★ GPO—708-276
Date Filed _____
By _____
File No. 544-84R