

UNION COUNTY SURVEYOR


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not originally established under GLO Contract

T 4 S R 38 E X - 07

No record of monumentation found in Union County survey records.



DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Union County Survey Number 020-2003

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey, I set a 5/8"x30" iron pin 28 inches in the ground, with 2 1/2" aluminum cap marked as shown, from which:

New Bearing Trees and Objects:

A 9 inch diameter double bole Lodgepole Pine bears N 84°E, a distance of 70.95 feet, marked X BT

A 10 inch diameter Lodgepole Pine bears S 70°E, a distance of 40.86 feet, marked C1/4 S32 BT

A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP" bears S 40°14'W, a distance of 16.47 feet,


A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP" bears N 62°25'W, a distance of 16.31 feet, driven in an existing East-West fence line

Set steel fence post approximately 1 ft. South of monument.

I hereby certify that the corner was monumented on July 14, 2003.

Witness: Gregory T. Blackman, Jr.

UNION COUNTY SURVEYOR	
Date Received	8/17/03
Date Filed	9/12/03
Filed By	<i>Gregory T. Blackman, Jr.</i>
File Number	035-2003R

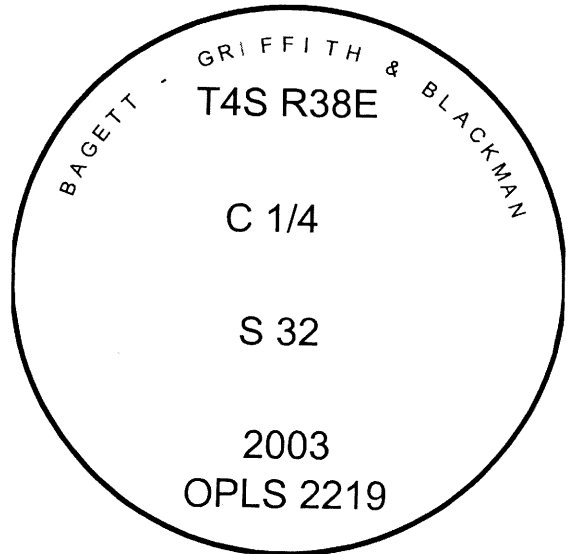

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2004

I used a steel tape and magnetic compass in the establishment of the bearing trees. I used a magnetic declination of 18° East. The distances are to a 50d spike driven on the right side of the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze. I used a Leica 530 GPS unit in the establishment of the bearing objects. The Basis of Bearing is the same as map of survey number 020-2003. The distances are to the center of the aluminum cap.