


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 4 S R 39 C-08



DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY NUMBER 031-2024

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:


At position determined by survey, I set a 5/8" x 30" iron pin, 30" in the ground, with a 2 1/2" aluminum cap marked as shown below, from which:

NEW BEARING OBJECTS:

A 5/8" iron pin, set by Survey Number 006-2004, bears North 83°22'13" West, a distance of 201.39 feet.

A 5/8" iron pin bears South 1°44'02" East, a distance of 159.00 feet, with yellow plastic cap marked BGB SURVEY MARKER.

Set a steel fencepost on NW side of monument.

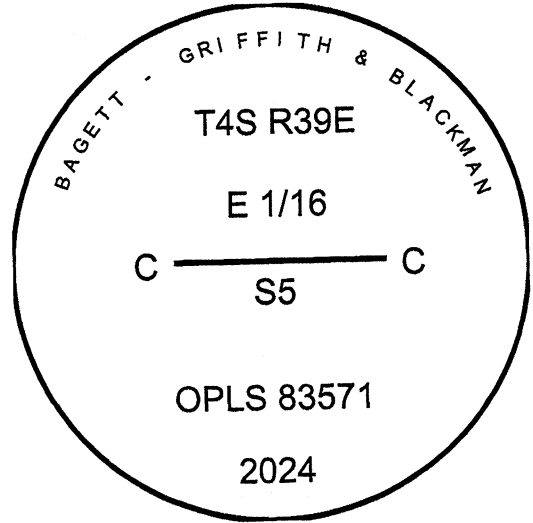

I hereby certify that the corner was monumented on August 22, 2024.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2025

I use a Leica GS-18 in the establishment of the accessories. Basis of bearing is as per Survey Number 031-2024.

UNION COUNTY
SURVEYOR

Date Received 8/23/24

Date Filed 8/23/24

Filed By

File Number 042-2024R