

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Tompson under GLO contract Number 103, dated Aug 3, 1863.


Surveyor General record states:

Set a post for 1/4 section corner in mound of earth with charred stake pit trench as per instructions

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of original monument

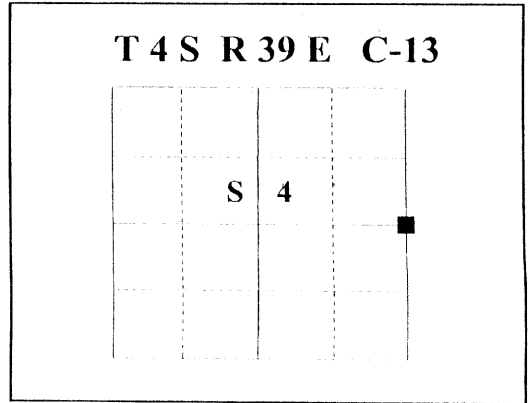

See map of Survey No. 024-2004, filed in the office of the Union County Surveyor.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: At proportionate position, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, in a wheat field 18" below ground level.

NEW reference points:

A 5/8" steel pin with 1½ inch aluminum cap bears N 32 44'E, 58.99ft marked NE RP

A 5/8" steel pin with 1½ inch aluminum cap bears S 34°22'E, 31.20ft marked SE RP

A 5/8" steel pin with 1½ inch aluminum cap bears S 37°40'W, 29.18ft marked SW RP

A 5/8" steel pin with 1½ inch aluminum cap bears N 25°52'W, 54.82ft marked NW RP

I hereby certify that the corner was monumented on August 6, 2004.


Witness: Mike Spicer

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

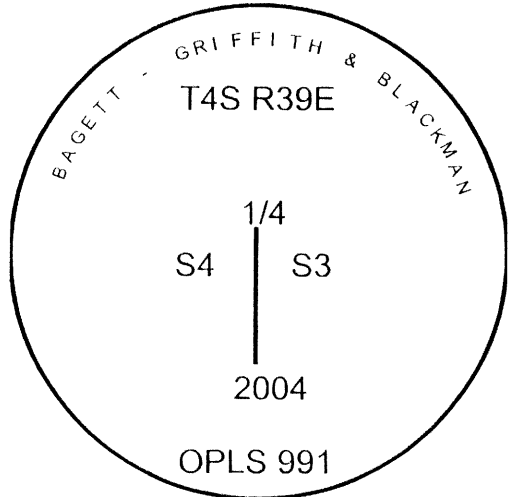

**UNION COUNTY
SURVEYOR**

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. ROBINSON, DGMT

File Number 091-2004R

The bearing and distance to the iron pins were determined by a GPS observation using a Leica 500 base and receiver. The basis of bearing is that of survey number 024-2004