

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Old Book 1 Page 84 states "set 7x10x26 inch stone in mound of stone for 1/8 corner" Survey No. 040-2002 establishes proportionate position of 1/16.

No record of subsequent monumentation found in the Union County monumentation records

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 8x11x26 inch stone marked "1/8" set firmly in mound of stone.

See Survey Number 044-2002

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At 8x11x26 inch stone, I set a 5/8"x30" iron pin with 2 1/2" aluminum cap, marked as shown, 21 inches in the ground, from which

BEARING OBJECTS:



A 5/8"x30" iron pin with 1 1/2" aluminum cap bears North 33° East, a distance of 13.61 feet, marked BGB SURVEY MARKER NE RP.

A 5/8"x30" iron pin with 1 1/2" aluminum cap bears North 56° West, a distance of 13.26 feet, marked BGB SURVEY MARKER NW RP.

Fence corner is 74 ft. North and 60 ft. East of monument. Buried stone alongside the West side of the monument. Set steel fencepost 1 ft. North of monument.

I hereby certify that the corner was monumented on November 22, 2002

Witness: Norbert W. Volny

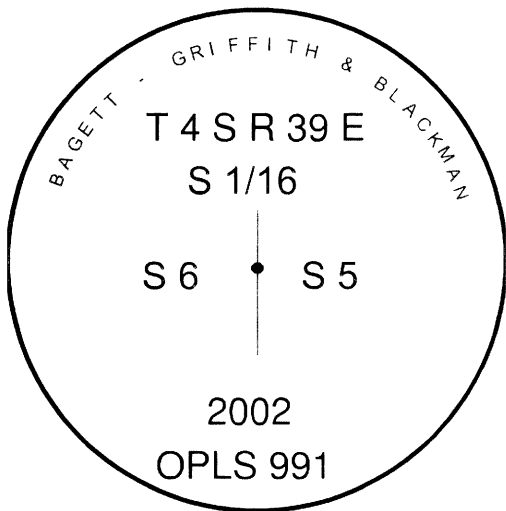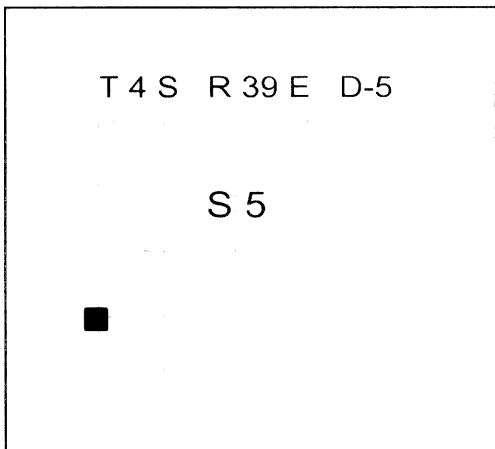

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

I used a Leica 530 GPS system in the establishment of the new accessories. The basis of bearing is the same as shown on Survey No. 044-2002, the distances are to center of the cap.

**UNION COUNTY
SURVEYOR**
Date Received 12/2/02
Date Filed 12/31/02
Filed By B. ROBINSON, DEPUTY
File Number 044-2002R