

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


Adams & Clark, Inc.  
1720 W. Fourth Ave.  
Spokane, WA 99204-1702

Corner Code E-9  
Township 4 South, Range 39 East

**History of original corner establishment:**

Original U.S. General Land Office Survey, 1863, states:

"40.00 chains Set post for Section corner in mound of stone".



**Description of corner evidence found:**

Found rock cairn per Oregon State Department of Transportation plan sheet, Hot Lake Overcrossing Section LaGrande-Baker Highway, 1968; and County Assessment Map; in east-west fence line.

**Description of monument and accessories I established to perpetuate the original location of this corner.**

Set 5/8"x36" rebar with 1-1/2" aluminum cap marked as shown below, in center of rock cairn.

Accessories:

Set 5/8"x24" rebar with yellow plastic cap marked "RP LS 1503"

S29°45'19"E 22.37'

S25°14'00"W 22.15'

N72°07'51"W 5.86'

Cut "+" in 4.5'X3' Stone, 0.6 above ground

N13°01'33"W 10.89'

UNION COUNTY  
SURVEYOR

Date Received 12/22/15

Date Filed 12/22/15

By [Signature]

File No. 20A-2015R


Accessory ties were made with electronic total station theodolite, and steel tape.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

[Signature]

OREGON  
JANUARY 18, 1974  
LESLIE D. KILLINGSWORTH  
1503

RENEWAL DATE 6/30/03

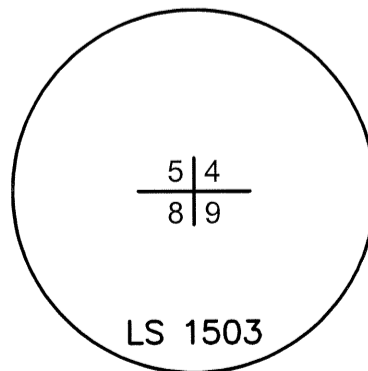

Leslie D. Killingsworth, P.L.S. 1503

11/01/2002

Date

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200408

CORNER COMMON TO SECTIONS 4, 5, 8 and 9

TWP. 4 S. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: July, 2004

LAT: 45 ° 14 ' 17.89905 " N

SURVEYOR: GREGORY T. BLACKMAN  
OPLS 991

LONG: 117 ° 57 ' 10.69226 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 583315.590 INT FT.

E: 8858060.938 INT FT.

TYPE: GPS

THETA: 1 ° 48 ' 22.7448309 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998953177

ELEV: 2882.88 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8" pin with 1 1/2" aluminum cap marked:  
Set by Survey Number 040-2002

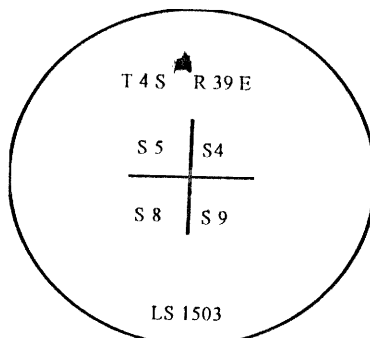

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*  
OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

Renewal Date: December 31, 2005

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)