

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract No.103, dated August 3, 1863. Surveyor General record states: Set post for corner to secs 4, 3, 9, and 10 in mound of earth with charred stake pits trenches as per instructions.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of original monument

See map of Survey #024-2004, filed in the office of the Union County Surveyor.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: At position determined by survey, I set a 2½"x 30" aluminum pipe with aluminum cap 29 inches in the ground from which:

NEW BEARING OBJECTS:

A 5/8" x 30" rebar with 1 ½ inch aluminum cap bears N 20°E a distance of 20.65 feet, marked BGB Survey Marker NE RP

A 5/8" x 30" rebar with 1½ inch aluminum cap bears S 15°E, a distance of 26.60 feet, marked "BGB SURVEY MARKER SE RP".


A 5/8" x 30" rebar with 1½ inch aluminum cap bears S 30°W, a distance of 28.15 feet, marked "BGB SURVEY MARKER SW RP".

A 5/8" x 30" rebar with 1½ inch aluminum cap bears N 43°W, a distance of 28.75 feet, marked "BGB SURVEY MARKER NW RP".

I hereby certify that the corner was monumented on August 12, 2004.


Witness: Mike Spicer

T 4S R 39 E E-13



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

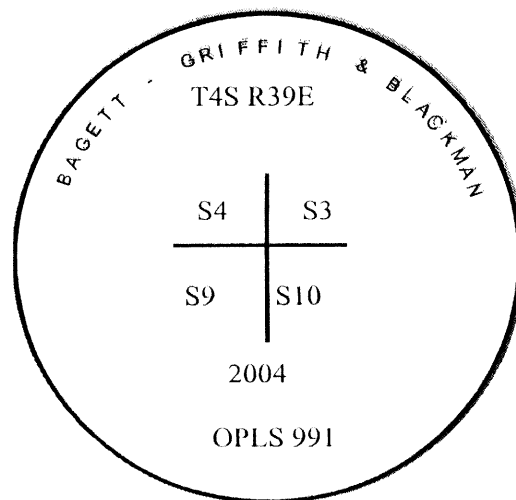

The bearing and distance to the reference points was determined by a GPS observation using a Leica 500 base and receiver. The basis of bearing is that of survey number 024-2004.

E-13

UNION COUNTY SURVEYOR
Date Received 12/30/04
Date Filed 12/30/04
Filed By R. ROBINSON, DGS 1517
File Number 098-2004E