

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated 3 September 1863. Surveyor General record states:

Set post for 1/4 section corner in mound of earth with charred stakes, pits, & trenches as per instructions

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner was found.

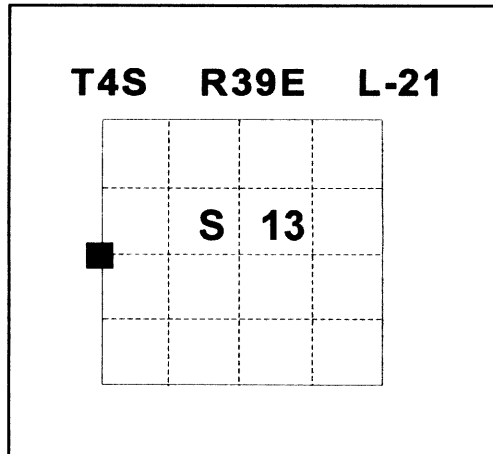

See Survey No. 032-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At intersection of Miller Lane and west line of Section 13 determined by Survey No. 032-1999, I set a 2½ x 30" Copper Clad monument marked as shown, in a valve box, 36" deep in the paved surface, from which:

NEW BEARING OBJECTS:


A 5/8" x 30" Iron rebar with aluminum cap marked NE RP, bears N 41°E a distance of 33.15 feet.

A PK nail 4 feet above ground in Power Pole, bears S 65°E a distance of 66.97 feet.


A 5/8" x 30" Iron rebar with aluminum cap marked SW RP, bears S 40°W a distance of 39.63 feet.

A 5/8" x 30" Iron rebar with aluminum cap marked NW RP bears N 40°W a distance of 32.66 feet.

I hereby certify that the corner was monumented on June 15, 1999
 Witness: Gregory T. Blackman Jr. and Norbert W. Volny

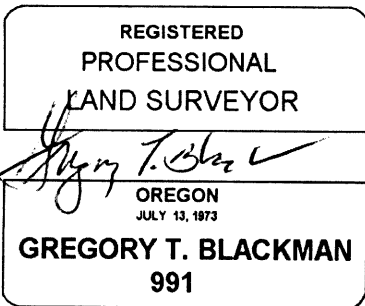

Renewal Date: December, 31 1999

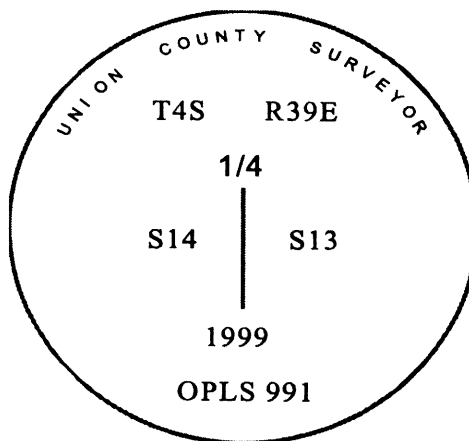

UNION COUNTY SURVEYOR

Date Received 9/13/99

Date Filed 10/8/99

Filed By R. ROBINSON, DEPUTY

File Number 037-1999R

I used a Leica TCA 1100 Total Station and circular prism in the establishment of the new accessories. The Basis of Bearing is the same as Survey No 032-1999. The distances are the center of each bearing object, unless otherwise noted above.

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9923

QUARTER CORNER:	GEODETTIC COOR: NAD 83(91)
SEC 14 13	LAT: 45:13'00.66639" N
TWP.4 S. RGE.39 E	LONG: 117:53'28.35467" W
UNION COUNTY, OREGON	SP. COOR: NAD 83(91)
DATE TIED: JULY, 1999	N: 576005.628 INT.FT
SURVEYOR: WALTER L. CASWELL	E: 8874213.757 INT.FT.
PLS 737	THETA: 1:51'00.423"
FIRM: EAGLE GPS SURVEY CORP	SCALE FACTOR: 0.999894934
6110 SW LOMBARD AVE.	ELEV: 2735.52 U.S.FT.
BEAVERTON, OR. 97008-4736	ELEV. DATUM: NGVD 1929(1947)
(503) 643-1073	*****
TYPE: GPS	
ORDER: SECOND CLASS: 1	

DIRECTIONS "TO REACH":

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Albert Hertel 10-14-99

OREGON
JULY 18, 1990
ALBERT HERTEL
1896

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 41 OF 63