


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by David P. Thompson under GLO contract Number 103, dated 1863. Surveyor General record states:

Set post for corner to Secs 14, 15, 22, & 23 in mound of earth with charred stake, pits, and trench as per instructions.

T 4 S R 39 E N - 17

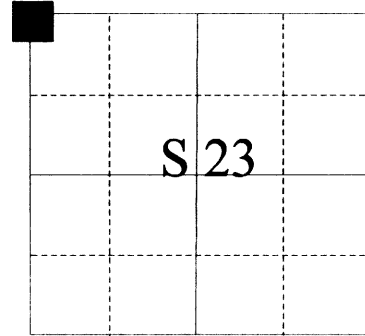

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found fence corner and Union Pacific Railroad Survey ties to Section Corner which were harmonious with the fence corner.

See Survey No. 032-1999

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**


**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At fence corner, I set a 2½"x30" aluminum mounument with aluminum cap marked as shown below, 30" in the ground.

- A 5/8"x30" iron rebar with aluminum cap marked NE RP bears N 33°E, a distance of 7.68 feet.
- A 5/8"x30" iron rebar with aluminum cap marked SE RP bears S 30°E, a distance of 18.20 feet.
- A 5/8"x30" iron rebar with aluminum cap marked SW RP bears S 26°W, a distance of 18.27 feet.
- A 5/8"x30" iron rebar with aluminum cap marked NW RP bears N 59°W, a distance of 8.41 feet.

I hereby certify that the corner was monumented on June 4, 1999.  
Witness: Gregory T. Blackman, Jr. and Norb Volny

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

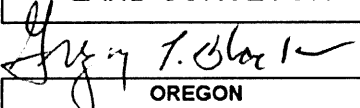

OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

*Renewal Date: December, 31 1999*

UNION COUNTY SURVEYOR

T4S R39E

S 15	S 14
S 22	S 23

1999  
OPLS 991

**UNION COUNTY  
SURVEYOR**

Date Received 9/13/99

Date Filed 10/8/99

Filed By R. ROBINSON, Deputy

File Number 041-1999E

I used a Leica TCA-1100 and circular prism in the establishment of the new accessories. The Basis of Bearings is the same as Survey No. 032-1999. The distances are the center of each bearing object, unless otherwise noted above

**GEODETIC CONTROL DATA**

**OREGON STATE PLANE, NORTH ZONE (3601)  
UNION COUNTY, OREGON**

\*\*\*\*\*

STA. NAME: 9927

SECTION CORNER:

SEC 15 | 14

SEC 22 | 23 T.4 S. R. 39 E

UNION COUNTY, OREGON

DATE TIED: JULY, 1999

SURVEYOR: WALTER L. CASWELL  
PLS 737

FIRM: EAGLE GPS SURVEY CORP  
6110 SW LOMBARD AVE.  
BEAVERTON, OR. 97008-4736  
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 1

\*\*\*\*\*  
DIRECTIONS "TO REACH":

GEODETIC COOR: NAD 83(91)

LAT: 45:12'33.97082" N

LONG: 117:54'43.11477" W

SP. COOR: NAD 83(91)

N: 573131.414 INT.FT

E: 8868951.969 INT.FT.

THETA: 1:50'07.404"

SCALE FACTOR: 0.999894834

ELEV: 2710.88 U.S.FT.

ELEV. DATUM: NGVD 1929(1947)



*Albert Hertel* 10-14-99  
OREGON  
JULY 18, 1980  
ALBERT HERTEL  
1896

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY  
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY  
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)  
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005  
SHEET 44 OF 63